




480W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-480 series**

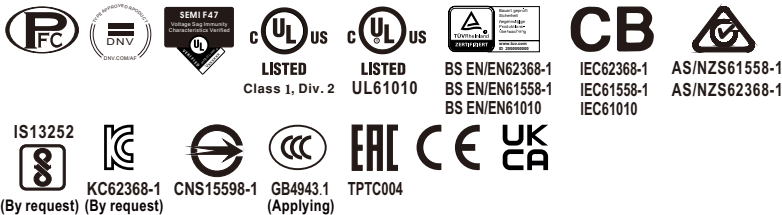

■ **Features**

- Three-Phase 320 ~ 600Vac wide range input (Dual phase operation possible)
- Global certificates in multi-fields(ITE 62368-1,Industrial 61558-1/-2-16,61010) & Marine DNV,SEMI47,C1D2 HazLoc approved
- 63mm Ultra slim width
- High efficiency up to 95.5% and no load power dissipation<3.1W by R.C.
- 200% Peak Power capability
- Built-in constant current limiting circuit
- Current sharing up to 1920W(3+1) for parallel use
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (OVC III)
- -40~+85°C wide range operation temperature (>+60°C derating)
- Operating altitude up to 5000 meters
- Built-in Remote ON/OFF Control and DC OK relay contact
- Ultra low inrush current < 10A
- Built-in ORing FET
- Tool free terminal block (LA type)
- Conformal coating
- Can be installed on DIN Rail TS-35/7.5 or 15
- 5 years warranty

■ **Applications**

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus


■ **GTIN CODE**

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ **Description**

The XTR-480 series is a 480W AC/DC 3Ø 320~600Vac input ultra slim industrial high-reliability DIN rail power. Key features of this series include a narrow 63 mm casing, optimizing system installation space, it boasts a maximum efficiency of 95.5% and a low standby power consumption <3.1W by remote control for energy savings and carbon reduction. It provides constant current with up to 200% peak power; fanless design , ultra-wide operating temperature range of -40 to +85°C (up to +60°C at full load); OVCIII compliance; parallel function capability up to 1920W; ultra-low inrush current of <10A; built-in Remote Control ,DC OK and ORing FET; internal PCB coating offers basic moisture and dust protection, and it has multiple terminal blocks for selection.With comprehensive protection functions, complete safety certifications, and a 5-years warranty, the XTR-480 series is a compact, high-performance, and highly reliable DIN rail power supply.

■ **Model Encoding**

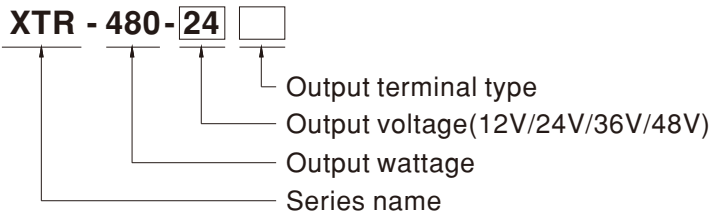

Terminal Type Options		Note
Blank	Screw Terminal	In stock
LA	Lever-Actuated	In stock
PI	Push In	In stock



Über die gesetzliche Gewährleistung hinausgehenden Garantieangaben sind Herstellergarantien.

480W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power

XTR-480 series


SPECIFICATION

MODEL			XTR-480-12□	XTR-480-24□	XTR-480-36□	XTR-480-48□	
			□=Blank, LA, PI				
OUTPUT	DC VOLTAGE		12V	24V	36V	48V	
	RATED CURRENT		30A	20A	13.3A	10A	
	CURRENT RANGE		0 ~ 30A	0 ~ 20A	0 ~ 13.3A	0 ~ 10A	
	RATED POWER		360W	480W	478.8W	480W	
	PEAK	CURRENT(5 sec.)	60A	64A	26.7A	20A	
		POWER(5 sec.)	720W	960W	961W	960W	
	RIPPLE & NOISE (max.) Note.2		120mVp-p	120mVp-p	150mVp-p	150mVp-p	
	VOLTAGE ADJ. RANGE		12 ~ 15V	24 ~ 29V	36 ~ 42V	48 ~ 55V	
	VOLTAGE TOLERANCE Note.3		± 2.0%	± 1.0%	± 1.0%	± 1.0%	
	LINE REGULATION		± 0.5%	± 0.5%	± 0.5%	± 0.5%	
	LOAD REGULATION		± 1.0%	± 1.0%	± 1.0%	± 1.0%	
	SETUP, RISE TIME		800ms, 60ms/400Vac 600ms, 60ms/500Vac at full load				
HOLD UP TIME (Typ.)		20ms / 400Vac 20ms / 500Vac at full load					
INPUT	VOLTAGE RANGE Note.4		Three-Phase 320 ~ 600Vac (Dual phase operation possible) 450 ~ 800Vdc				
	NO LOAD	Remote Power OFF	3.1W/400Vac	3.1W/400Vac	3.1W/400Vac	3.1W/400Vac	
	CONSUMPTION(Typ.)	Remote Power ON	5.0W/400Vac	5.0W/400Vac	5.0W/400Vac	5.0W/400Vac	
	FREQUENCY RANGE		47 ~ 63Hz				
	POWER FACTOR (Typ.)		PF≥0.92/400Vac PF≥0.88/500Vac at full load				
	EFFICIENCY (Typ.)		93%	94%	94.5%	95.5%	
	AC CURRENT (Typ.)		0.85A/400Vac 0.7A/500Vac				
	INRUSH CURRENT (Typ.)		COLD START 10A/500Vac				
	LEAKAGE CURRENT		<3.5mA / 530Vac				
PROTECTION	OVERLOAD		105%~200% rated output power for more than 5 sec then constant current limiting without shutdown at rate current when Vo=30%~100% Hiccup mode when Vo<30% rated voltage				
	OVER VOLTAGE		15 ~ 18V	30 ~ 35V	43 ~ 50V	56 ~ 65V	
	OVER TEMPERATURE		Protection type : Shut down o/p voltage, re-power on to recover Shut down o/p voltage or hiccup mode, recovers automatically after temperature goes down				
	FUNCTION		Up to 1920W (3+1), please refer to Function Manual for more details				
FUNCTION	PARALLEL		Relay Contact Ratings (max.):30Vdc/1A, 30Vac/0.5A resistive load				
	DC OK RELAY CONTACT		Power ON : RC + ~ RC- open or keep 2~5Vdc Power OFF: RC + ~ RC- short or keep<0.5Vdc				
	REMOTE CONTROL		Power ON : RC + ~ RC- open or keep 2~5Vdc Power OFF: RC + ~ RC- short or keep<0.5Vdc				
ENVIRONMENT	WORKING TEMP. Note.5		-40 ~ +85℃ (Refer to "Derating Curve")				
	WORKING HUMIDITY		20 ~ 95% RH non-condensing				
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing				
	TEMP. COEFFICIENT		± 0.03%/℃ (0 ~ 60℃)				
	VIBRATION		Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6				
SAFETY & EMC (Note 7)	SAFETY STANDARDS		UL121201/CSA C22.2 NO.213.17 Class I, Div. 2 Group A, B, C, D Hazardous Locations T4; UL61010; TUV BS EN/EN62368-1, BS EN/EN61558-1/-2-16,BS EN/EN61010;CB IEC62368-1,IEC61558-1,IEC61010;RCM AS/NZS 62368-1,AS/NZS 61558-1/-2-16; BSMI CNS15598-1;CCC GB4943.1;EAC TPTC004 approved; KC KC62368-1 and BIS IS13252 (Part 1):2010 certified, no stock ,contact sale for inquires				
	OVER VOLTAGE CATEGORY Note.6		IEC/EN 61558-1/-2-16 (OVC III, altitude up to 2000m) IEC/EN/UL 61010 (OVC II, altitude up to 5000m) IEC/EN 62368-1 (OVC II, altitude up to 5000m)				
	SAFETY EXTRA-LOW VOLTAGE (SELV)		IEC/EN 61558-2-16 (SELV) IEC/EN/UL 61010-2-201 (SELV) IEC/EN 62368-1 (SELV/ ES1)				
	WITHSTAND VOLTAGE		I/P-O/P:4.87KVac I/P-FG:2.5KVac O/P-FG:0.5KVac O/P-DC OK:0.5KVac				
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25℃ / 70% RH				
	EMC EMISSION	Parameter		Standard		Test Level / Note	
		Conducted		BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936		Class B	
		Radiated		BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936		Class B	
		Harmonic Current		BS EN/EN61000-3-2		Class A	
		Voltage Flicker		BS EN/EN61000-3-3		-----	
	EMC IMMUNITY	BS EN/EN55035 , BS EN/EN61204-3					
		Parameter		Standard		Test Level / Note	
		ESD		BS EN/EN61000-4-2		Level 4, 15KV air ; Level 4, 8KV contact	
		Radiated Field		BS EN/EN61000-4-3		Level 3, 10V/m ; criteria A	
		EFT / Burst		BS EN/EN61000-4-4		Level 4, 4KV ; criteria A	
Surge		BS EN/EN61000-4-5		Level 4, 2KV / Line-Line, Level 4, 4KV/ Line-Earth			
Conducted		BS EN/EN61000-4-6		Level 3, 10V/m ; criteria A			
Magnetic Field		BS EN/EN61000-4-8		Level 4, 30A/m ; criteria A			
Voltage Dips and Interruptions		BS EN/EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods> 95% interruptions 250 periods			
OTHERS	MTBF		K hrs min. Telcordia SR-332(Bellcore) ; K hrs min. MIL-HDBK-217F (25℃)				
	DIMENSION		63*125.2*125mm (W*H*D)				
	PACKING		1.3Kg ; 10pcs/14Kg/1.1CUFT				
NOTE		1. All parameters NOT specially mentioned are measured at 400Vac input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Dual phase operation is allowed under certain derating to output load. Please refer to derating curves for details. 5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended. 6. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 7. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx					




480W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-480** series


■ Block Diagram

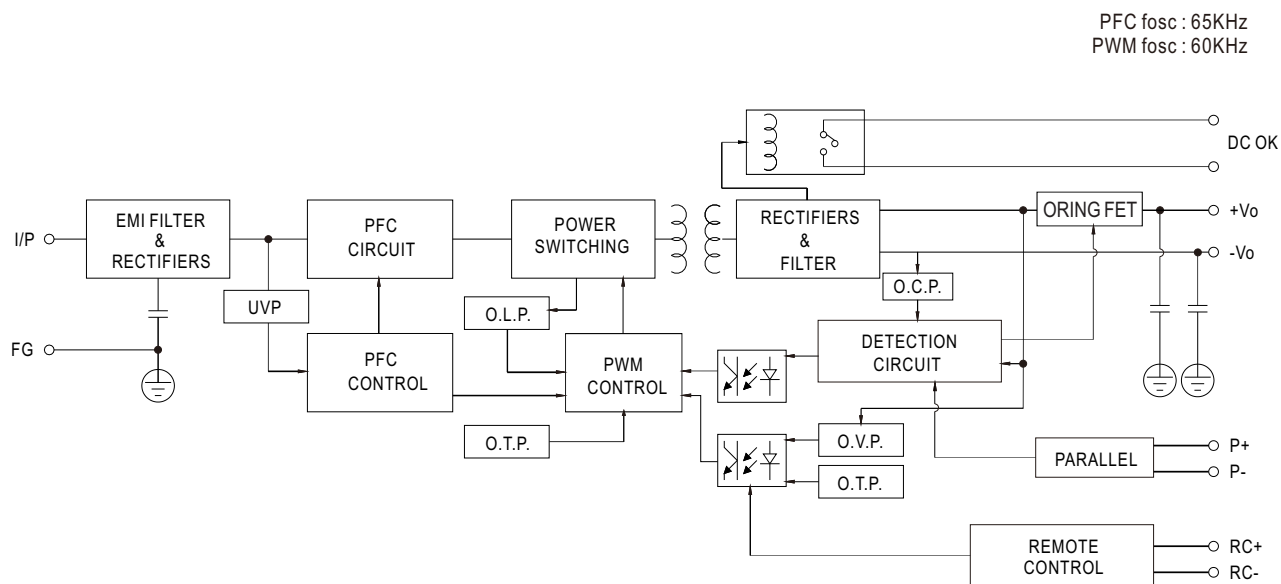

■ Derating Curve

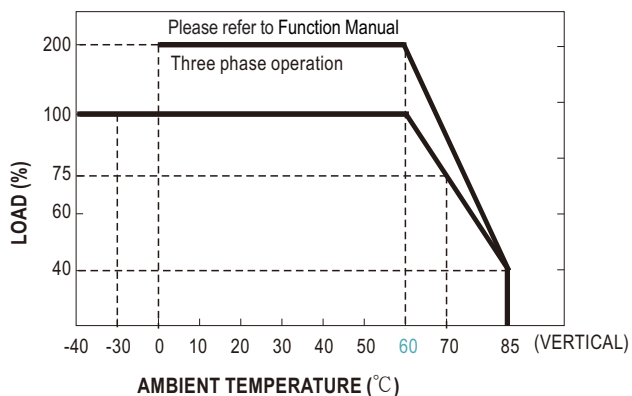

■ Output derating VS input voltage

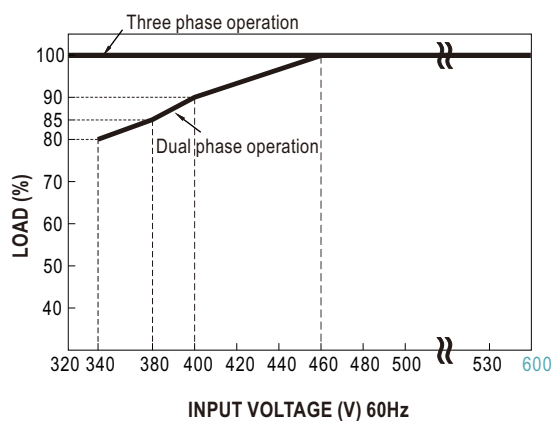




480W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-480** series

■ Peak Power

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$\text{Duty} = \frac{t}{T} \times 100\% \leq 35\%$$

$$t \leq 5 \text{ sec}$$

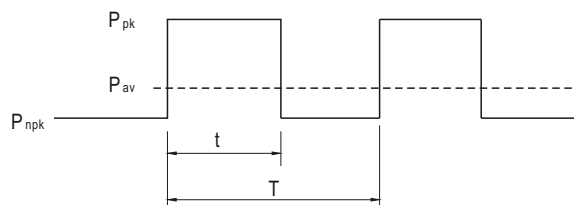

P_{av} : Average output power (W)


P_{pk} : Peak output power (W)

P_{npk} : Non-peak output power (W)

P_{rated} : Rated output power (W)

t : Peak power width (sec)

T : Period (sec)

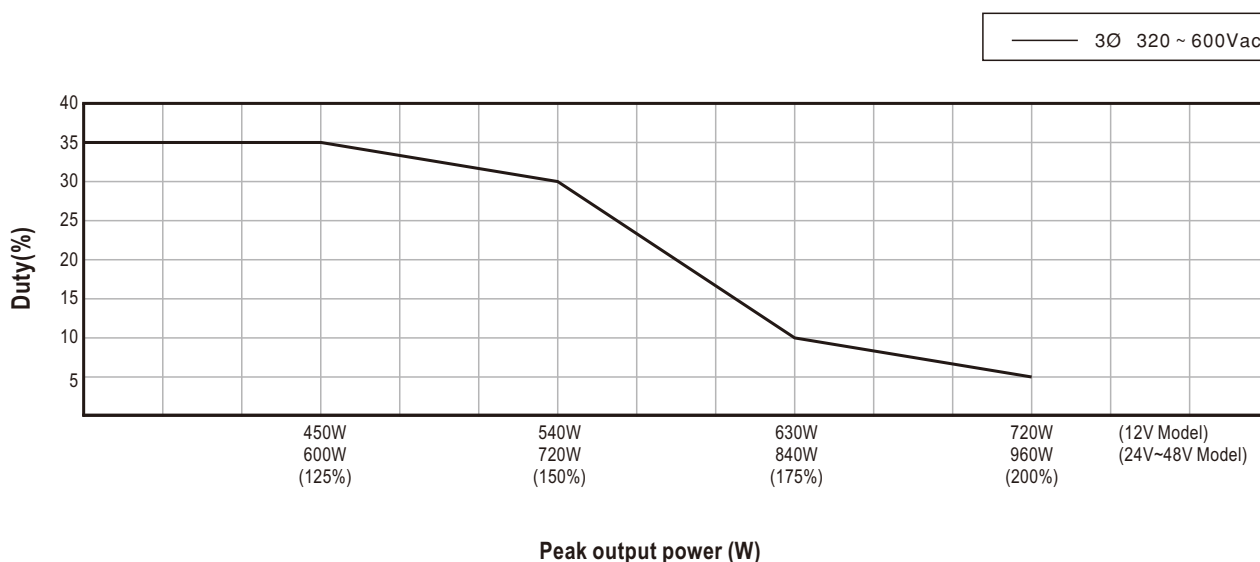

For example (24V model) :

$V_{in} = 400V$ $\text{Duty}_{max} = 5\%$

$P_{av} = P_{rated} = 480W$

$P_{pk} = 960W$

$t \leq 5 \text{ sec}$

$$T \geq \frac{5 \text{ sec}}{5\%} \geq 100 \text{ sec}$$

$$P_{npk} \leq \frac{T P_{av} - t P_{pk}}{T-t}$$



$$P_{npk} \leq 454.7W$$



480W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-480** series

■ Function Manual

Pin No.	Function	Description
1,2	DC OK Relay Contact	Contact close : PSU turns ON/DC_OK ; Contact open : PSU turns OFF/DC_fail; Contact ratings (max.): 30Vdc/1A,30Vac/0.5A resistive load.
3	P+	Current sharing signal. When units are connected in parallel, the P+ pins of the units should be connected mutually to allow current balance between units.
4	P-	Current sharing signal. When units are connected in parallel, the P- pins of the units should be connected mutually to allow current balance between units. P- Signal is internally connected to -Vo.
5	RC+	Turns the output ON and OFF by electrical singal Remote power ON : Open or keep 2~5Vdc
6	RC-	Remote power OFF: Short or keep<0.5Vdc

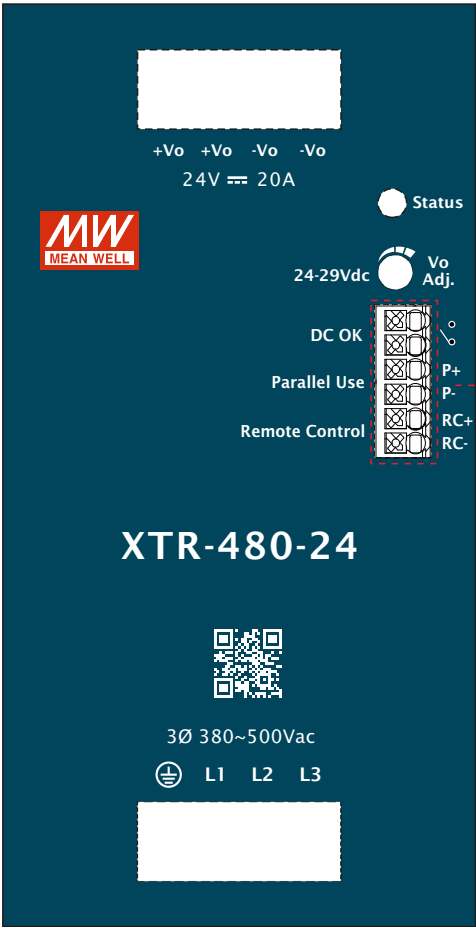



480W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-480** series


1.Parallel Use

XTR-480 has the built-in active current sharing function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below :

- (1) Parallel operation is available by connecting the units shown as below (P+,P- are connected mutually in parallel).
- (2) Difference of output voltages among parallel units should be less than 0.2V.
- (3) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)=(The rated current per unit) x (Number of unit) x 0.9.
- (4) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (5) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- (6) When in parallel operation, the minimum output load should be greater than 5% of total output load. (Min. load >5% rated current per unit x number of unit)
- (7) In parallel connection, maybe only one unit (master) operate if the total output load is less than 5% of rated load condition.

The other PSUs (slaves) may go into standby mode and their output LEDs & relays will not turn on.



- (8) P+ and P- lines should be twisted in pairs

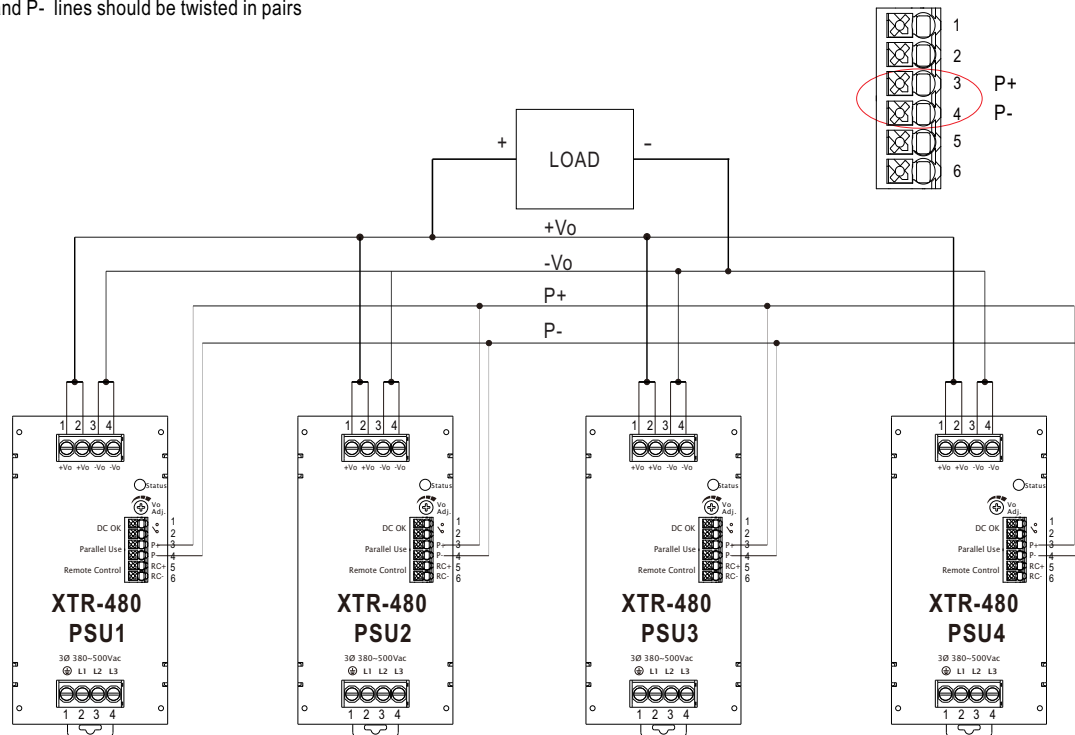

※ Please contact MEAN WELL for more details.

2.DC OK Relay Contact

Contact Close	PSU turns ON / DC OK.
Contact Open	PSU turns OFF / DC Fail.
Contact ratings (max.)	30Vdc/1A, 30Vac/0.5A resistive load.

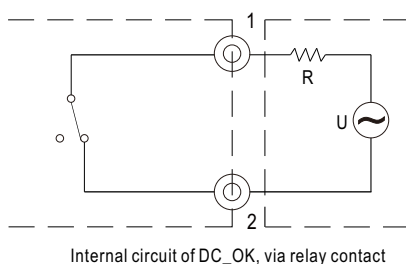

External voltage source (U) and resistor (R)
(The max. Sink is 30Vdc/1A, 30Vac/0.5A)

Internal circuit of DC_OK, via relay contact




480W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-480** series

3. Remote ON/OFF Control

The PSU can be turned ON/OFF by using the "Remote Control" function.


PSU Vo Status	Between RC+ and RC-
Remote power ON	Open or keep 2~5Vdc
Remote power OFF	Short or keep <0.5Vdc



R.C. by external switch .	R.C. by user's optocoupler control module.	R.C. by user's external auxiliary power .	R.C. by user's Relay control module.

4. Protection Against Reverse Voltages from the Load

Prevent PSU damage from Back Electro magnetic Force during deceleration of motor or inductive load.

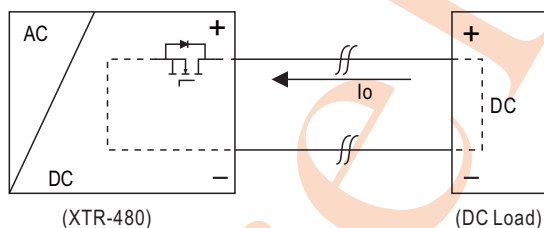

PSU'S ORing FET turn OFF voltage	
MODEL	Max. allowable reverse voltage
XTR-480-12	<16V
XTR-480-24	<35V
XTR-480-36	<50V
XTR-480-48	<63V




480W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-480** series

■ Mechanical Specification

(Unit:mm , Tolerance ± 1 mm)

Case No.305

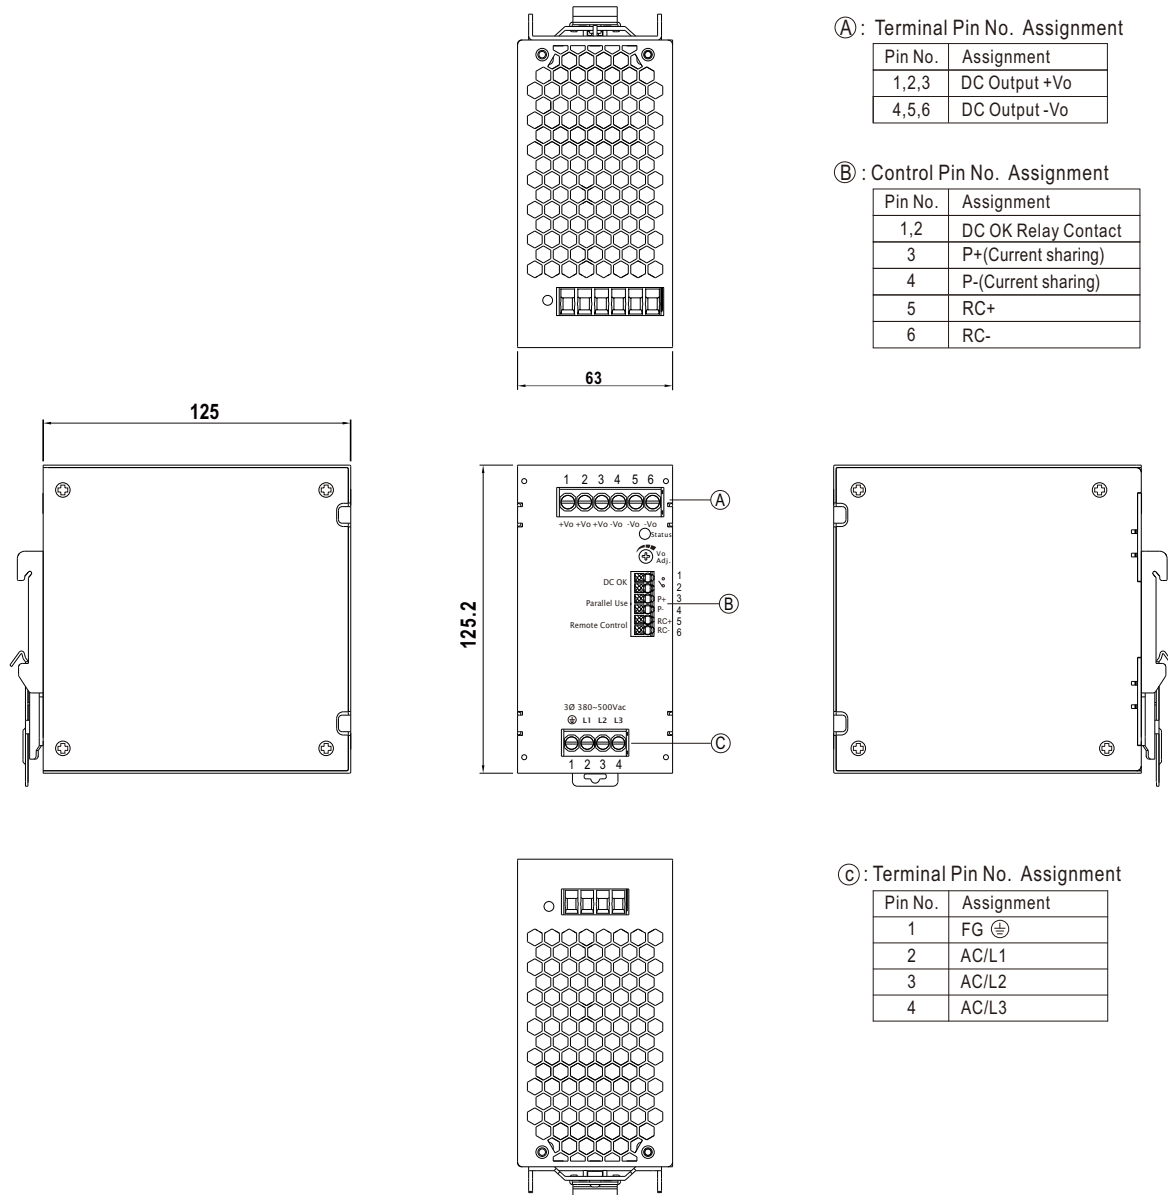


■ Recommend Wiring

	AC Input T.B	DC Output T.B	Signal connector
Solid Wire	6mm ² max.	6mm ² max.	1.5mm ² max.
A.W.G	18~10 AWG	18~10 AWG	24~16 AWG
Screw Terminal Torque	9 Lb-In	9 Lb-In	/



480W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-480** series

■ Installation Instruction

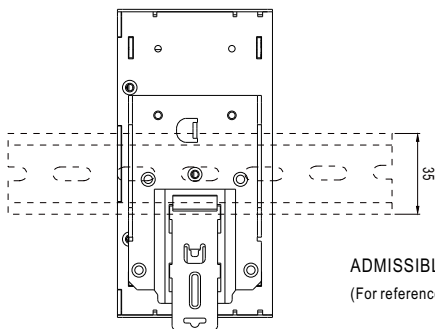

This series fits DIN rail TS35/7.5 or TS35/15.

For installation details, please refer to the Instruction manual.

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

(For reference only. Not included with unit.)

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>