




75W AC/DC Economical Ultra Slim Industrial DIN Rail Power

XDR-75E series

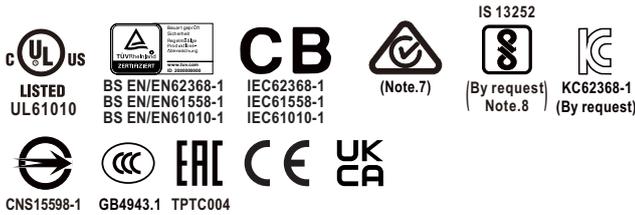

■ Features


- 85~264Vac input range
- Global certificates in multi-fields (ITE 62368-1, Industrial 61558-1/-2-16, 61010)
- 30mm slim width
- High efficiency up to 91% and no load power dissipation < 1W
- Built-in constant current limiting circuit
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (OVC III)
- -40~+70°C wide range operation temperature (>+50°C derating)
- Operating altitude up to 5000 meters
- Built-in DC OK relay contact
- Can be installed on DIN rail TS-35/7.5 or 15
- 3 years warranty

■ Description

The XDR-75E series is a 75W AC/DC economical ultra slim industrial DIN rail power. Key features of this series include a narrow 30mm casing, optimizing system installation space, and an ultra-wide input range of 85~264Vac suitable for global use. It boasts a maximum efficiency of 91% and a low standby power consumption < 1W for energy savings and carbon reduction. It has built-in constant current, fanless design, a wide operating temperature range of -40 to +70°C (up to +50°C at full load); OVCIII compliance; built-in DC OK signal. With comprehensive protection functions, complete safety certifications, and a 3-years warranty, the XDR-75E series is a compact, high-performance, and highly reliable DIN rail power supply.

■ Model Encoding

XDR - 75 E - 24

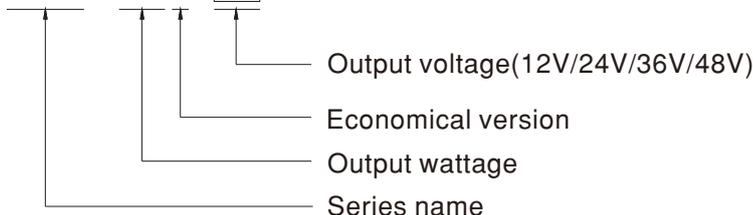

■ Applications

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus
- Battery charger

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>




| SPECIFICATION | XDR-75E-12 | XDR-75E-24 | XDR-75E-36 | XDR-75E-48 |
|------------------------------------|--|---|----------------------------|------------|
| OUTPUT | | | | |
| DC VOLTAGE | 12V | 24V | 36V | 48V |
| RATED CURRENT | 6.3A | 3.2A | 2.1A | 1.6A |
| CURRENT RANGE | 0 ~ 6.3A | 0 ~ 3.2A | 0 ~ 2.1A | 0 ~ 1.6A |
| RATED POWER | 75.6W | 76.8W | 75.6W | 76.8W |
| RIPPLE & NOISE (max.) | Note.2 100mVp-p | 100mVp-p | 120mVp-p | 120mVp-p |
| VOLTAGE ADJ. RANGE | 12 ~ 15V | 24 ~ 29V | 36 ~ 42V | 48 ~ 55V |
| VOLTAGE TOLERANCE | Note.3 ±2.0% | ±1.0% | ±1.0% | ±1.0% |
| LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% |
| LOAD REGULATION | ±1.0% | ±1.0% | ±1.0% | ±1.0% |
| SETUP, RISE TIME | 1200ms, 60ms/230Vac 2500ms, 60ms/115Vac at full load | | | |
| HOLD UP TIME (Typ.) | 16ms/230Vac 10ms/115Vac at full load | | | |
| INPUT | | | | |
| AC VOLTAGE RANGE | 85 ~ 264Vac | | | |
| DC VOLTAGE RANGE | 120 ~ 370Vdc | | | |
| NO LOAD POWER CONSUMPTION (Typ.) | 0.5W @115Vac 0.7W @230Vac | 0.8W @115Vac 0.9W @230Vac | 0.8W @115Vac 1W @230Vac | |
| FREQUENCY RANGE | 47 ~ 63Hz | | | |
| EFFICIENCY (Typ.) | 89% | 90% | 91% | 91% |
| AC CURRENT (Typ.) | 1.4A/115Vac 0.8A/230Vac | | | |
| INRUSH CURRENT (Typ.) | COLD START 18A/115Vac 35A/230Vac | | | |
| LEAKAGE CURRENT | <1mA / 240Vac | | | |
| PROTECTION | | | | |
| OVERLOAD | 105-130% rated output power, constant current limiting without shutdown, recovers automatically after fault condition is removed | | | |
| OVER VOLTAGE | 15 ~ 18V | 30 ~ 34V | 43 ~ 50V | 56 ~ 65V |
| | Protection type : Shut down o/p voltage, re-power on to recover | | | |
| OVER TEMPERATURE | Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | |
| FUNCTION | | | | |
| DC OK RELAY CONTACT | Relay Contact Ratings (max.):30Vdc/1A, 30Vac/0.5A resistive load | | | |
| ENVIRONMENT | | | | |
| WORKING TEMP. | -40 ~ +70°C (Refer to "Derating Curve") | | | |
| WORKING HUMIDITY | 20 ~ 95% RH non-condensing | | | |
| STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH non-condensing | | | |
| TEMP. COEFFICIENT | ±0.03% /°C (0 ~ 50°C) | | | |
| VIBRATION | Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6 | | | |
| SAFETY & EMC Note.6&7&8 | | | | |
| SAFETY STANDARDS | CB | IEC 62368-1, IEC 61558-1/2-16, IEC 61010-1/-2-201 | | |
| | TUV | BS EN/EN 62368-1, BS EN /EN 61558-1/-2-16, BS EN/EN 61010-1/-2-201 | | |
| | UL | UL/CUL 61010-1/-2-201 | | |
| | CCC | GB4943.1 | | |
| | BSMI | CNS15598-1 | | |
| | EAC | TPTC004 approved | | |
| | KC/BIS | KC 62368-1 and BIS IS 13252 (Part 1) certified, no stock by request ,contact sales for inquires | | |




| SPECIFICATION | XDR-75E-12 | XDR-75E-24 | XDR-75E-36 | XDR-75E-48 |
|--|--|---|------------|---|
| SAFETY & EMC Note.6&7&8 | | | | |
| OVER VOLTAGE CATEGORY Note.4 | IEC/EN 61558-1/-2-16 (OVC III, altitude up to 2000m) IEC/EN/UL 61010-1/-2-201 (OVC II, altitude up to 5000m) IEC/EN 62368-1 (OVC II, altitude up to 5000m) | | | |
| SAFETY EXTRA-LOW VOLTAGE(SELV) | IEC/EN 61558-2-16 (SELV) IEC/EN 62368-1 (SELV / ES1) | | | |
| WITHSTAND VOLTAGE | I/P-O/P: 4KVac I/P-FG: 2KVac O/P-FG: 1.5KVac O/P-DC OK: 0.5KVac | | | |
| ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500Vdc/25°C / 70%RH | | | |
| EMC EMISSION | Parameter | Standard | | Test Level / Note |
| | Conducted | BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832 | | Class B |
| | Radiated | BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832 | | Class B |
| | Harmonic Current | BS EN/EN61000-3-2 | | Class A |
| | Voltage Flicker | BS EN/EN61000-3-3 | | ----- |
| EMC IMMUNITY | BS EN/EN55035, BS EN/EN61204-3, BS EN/EN61000-6-2(BS EN/EN50082-2), KS C 9835 | | | |
| | Parameter | Standard | | Test Level / Note |
| | ESD | BS EN/EN61000-4-2 | | Level 3, 8KV air ; Level 2, 4KV contact; criteria A |
| | Radiated | BS EN/EN61000-4-3 | | Level 3, 10V/m ; criteria A |
| | EFT / Burst | BS EN/EN61000-4-4 | | Level 3, 2KV ; criteria A |
| | Surge | BS EN/EN61000-4-5 | | Level 4, 2KV/Line-Line ; Level 4, 4KV/Line-Line-Chassis ; criteria A |
| | Conducted | BS EN/EN61000-4-6 | | Level 3, 10V ; criteria A |
| | Magnetic Field | BS EN/EN61000-4-8 | | Level 4, 30A/m ; criteria A |
| OTHERS | | | | |
| MTBF | 2425.7K hrs min. Telcordia SR-332 (Bellcore) ; 533.7K hrs min. MIL-HDBK-217F (25°C) | | | |
| DIMENSION | 30*125.2*116mm (W*H*D) | | | |
| PACKING | 465g; 24pcs/12.15Kg/1.16CUFT | | | |
| NOTE | | | | |
| <p>1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μF & 47 μF parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended.</p> <p>6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)</p> <p>7. The Regulatory Compliance Mark (RCM) is applied on a voluntary basis. The equipment meets the relevant IEC or AS/NZS standards, or AS/NZS 3820 where applicable. The use of the RCM mark complies with AS/NZS 4417.1.</p> <p>8. Some factory or model may not have the BIS logo, please contact your MEAN WELL sales for more information.</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p> | | | | |




Block Diagram

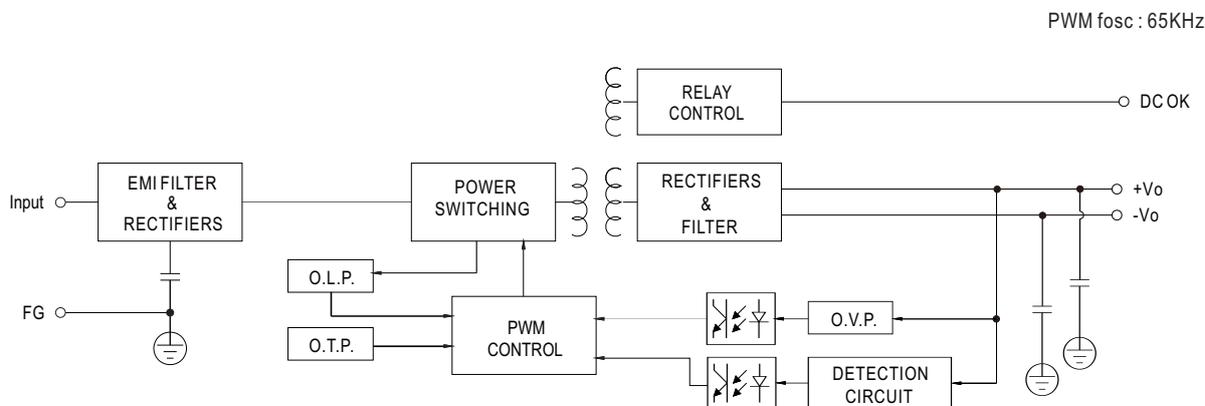

Derating Curve

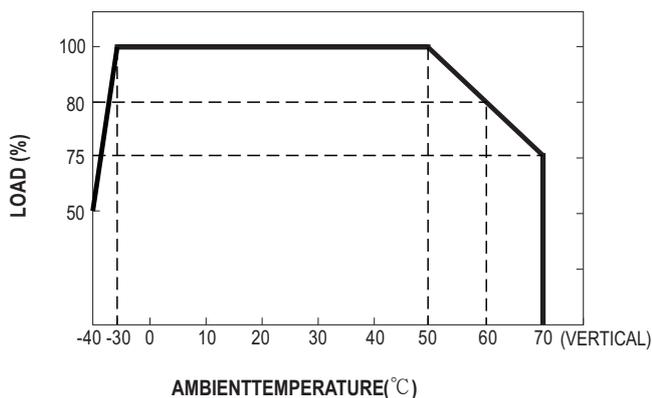

Static Characteristics

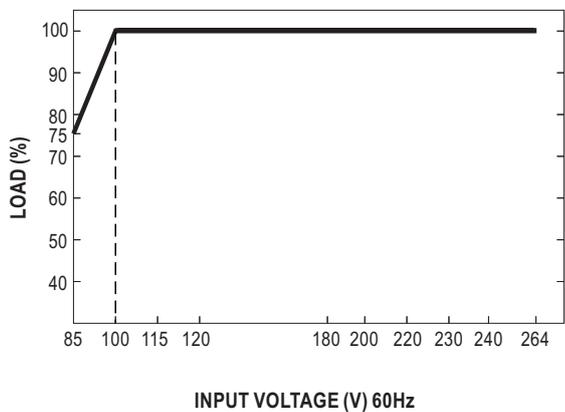




■ **Function Manual**


1. DC OK Relay Contact

| | |
|------------------------|--------------------------------------|
| Contact Close | PSU turns ON / DC OK. |
| Contact Open | PSU turns OFF / DC Fail. |
| Contact Ratings (max.) | 30Vdc/1A, 30Vac/0.5A resistive load. |

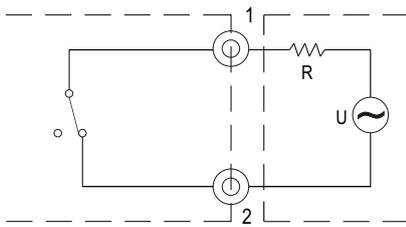

External voltage source (U) and resistor (R)
(The max. Sink is 30Vdc/1A, 30Vac/0.5A)

Internal circuit of DC_OK, via relay contact

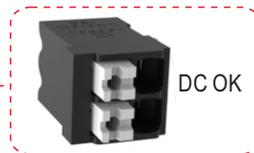




■ **Mechanical Specification**

(Unit:mm , Tolerance ± 1 mm)

Case No.301

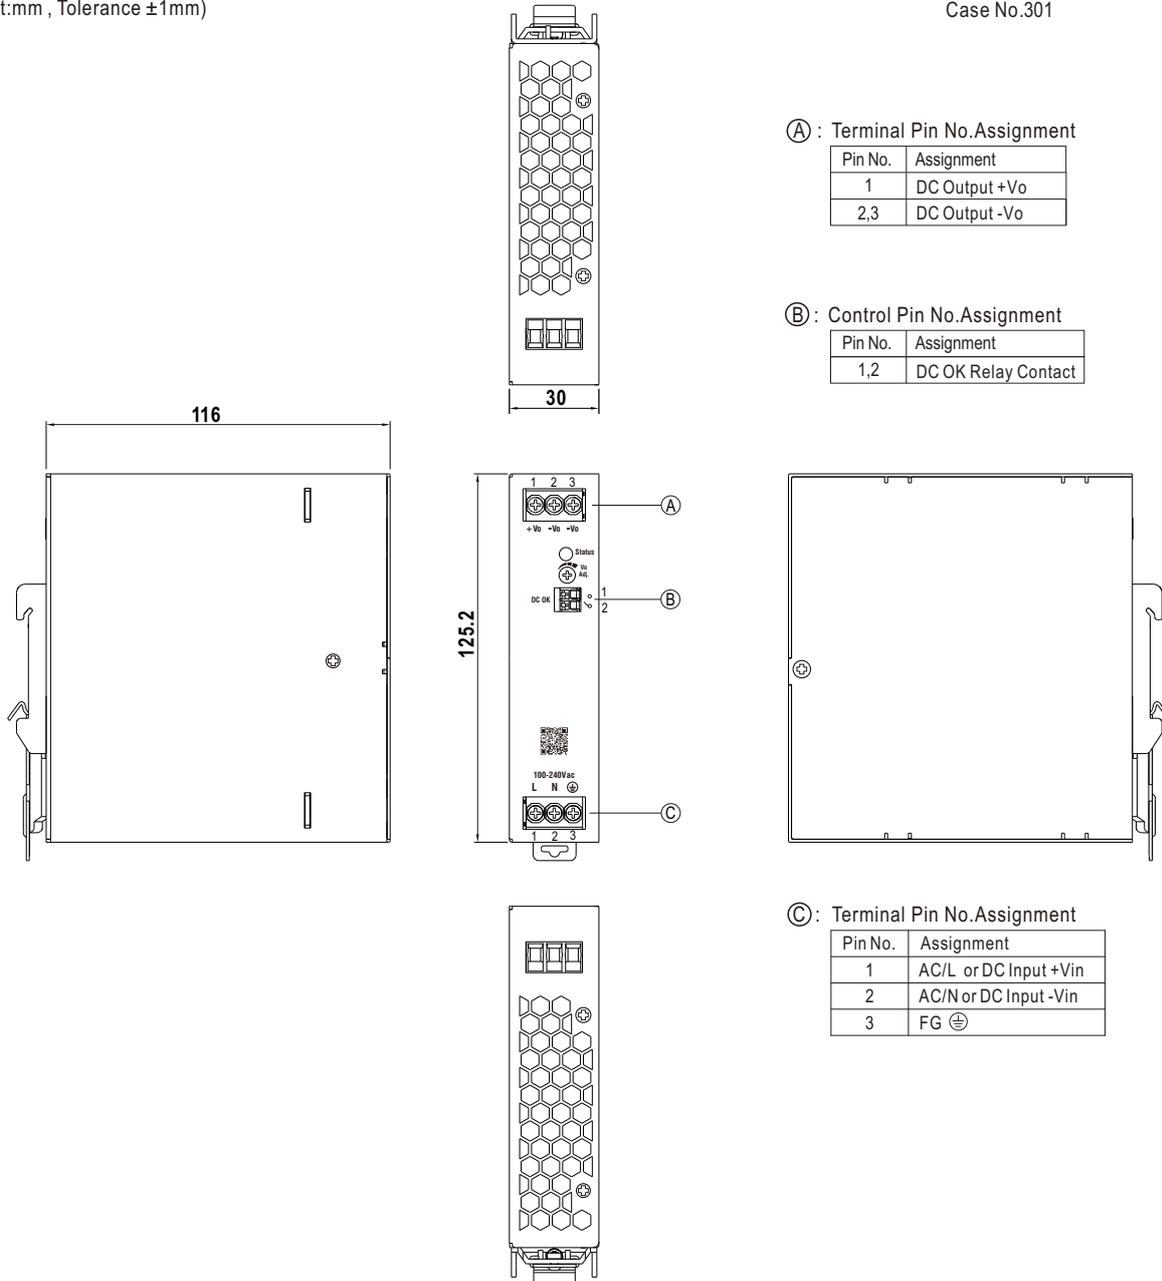

Ⓐ : Terminal Pin No.Assignment

| Pin No. | Assignment |
|---------|---------------|
| 1 | DC Output +Vo |
| 2,3 | DC Output -Vo |

Ⓑ : Control Pin No.Assignment

| Pin No. | Assignment |
|---------|---------------------|
| 1,2 | DC OK Relay Contact |

Ⓒ : Terminal Pin No.Assignment


| Pin No. | Assignment |
|---------|-----------------------|
| 1 | AC/L or DC Input +Vin |
| 2 | AC/N or DC Input -Vin |
| 3 | FG \oplus |

■ **Recommend Wiring**

| | AC Input T.B | DC Output T.B | Signal connector |
|-----------------------|-----------------------|-----------------------|-------------------------|
| Solid Wire | 6mm ² max. | 6mm ² max. | 1.5mm ² max. |
| A.W.G | 18~10 AWG | 18~10 AWG | 24~16 AWG |
| Wire Stripping Length | 7~8mm | 7~8mm | 8~9mm |
| Screw Terminal Torque | 5 Lb-In | 5 Lb-In | / |



■ **Installation Instruction**

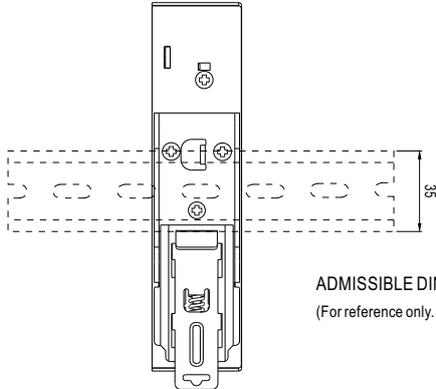

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15
(For reference only. Not included with unit.)

This series fits DIN rail TS35/7.5 or TS35/15.
For installation details, please refer to the Instruction manual.

■ **Installation Manual**

Please refer to : <http://www.meanwell.com/manual.html>