



180W Level VI Desktop Type Power Supply

ENP-180 series



Front



User's Manual



Back



■ Features

- Universal AC input / Full range
- Built-in active PFC function
- Energy efficiency Level VI
- No load power consumption <0.15W
- Comply with EISA 2007/DoE, NRCAN and EU ErP
- 125% peak load capability
- Fanless design, cooling by free air convection
- Protection: Short circuit / Overload / Over voltage / Over temperature
- 3 years warranty

■ Applications

- Land mobile radio system
- Surveillance system
- TV antenna facility

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

ENP-180 series is a 180W desktop type power supply working perfectly for communication related applications. Observing the standard 7" width size in the land mobile radio field, it provides the most frequently used voltage in the communication field. With the rugged mechanical design along with the high efficiency circuitry, it operates for the ambient temperature range -30°C~+70°C under free air convection.

■ Model Encoding

ENP - 180 - 24

Nominal voltage
Rated wattage
Series name



180W Level VI Desktop Type Power Supply

ENP-180 series

SPECIFICATION


MODEL		ENP-180-12		ENP-180-24		ENP-180-48		
OUTPUT	DC VOLTAGE		13.8V		27.6V		55.2V	
	RATED CURRENT		13A		6.5A		3.3A	
	CURRENT	RATED	0 ~ 13A		0 ~ 6.5A		0 ~ 3.3A	
		PEAK Note.2	16.3A		8.1A		4.1A	
	WATTAGE	RATED	179W		179W		182W	
		PEAK Note.2	225W		224W		226W	
	RIPPLE & NOISE (max.) Note.3		150mVp-p		150mVp-p		350mVp-p	
	VOLTAGE ADJ. RANGE		11.5 ~ 15V		23.5 ~ 30V		47.5 ~ 58.8V	
	VOLTAGE TOLERANCE Note.4		± 1.0%		± 1.0%		± 1.0%	
	LINE REGULATION Note.5		± 0.5%		± 0.5%		± 0.5%	
LOAD REGULATION Note.6		± 2.0%		± 1.0%		± 0.5%		
SETUP, RISE TIME Note.7		1000ms, 100ms at full load						
HOLD UP TIME (Typ.)		20ms at full load						
INPUT	VOLTAGE RANGE Note.8		90 ~ 264VAC 127 ~ 370VDC					
	FREQUENCY RANGE		47 ~ 63Hz					
	POWER FACTOR (Typ.)		PF>0.98/115VAC, PF>0.95/230VAC at full load					
	EFFICIENCY (Typ.)		91%		93.5%		94%	
	AC CURRENT (Typ.)		1.9A/115VAC 0.95A/230VAC					
	INRUSH CURRENT (Typ.)		COLD START 70A at 230VAC					
	LEAKAGE CURRENT		<3.5mA / 240VAC					
NO LOAD POWER CONSUMPTION		<0.15W						
PROTECTION	SHORT CIRCUIT		Protection type : Constant current limiting, recovers automatically after fault condition is removed					
	OVERLOAD		Normally works within 110 ~ 125% rated output power for more than 3 seconds and switches to constant current limiting, with auto-recovery after the peak load condition is removed Constant current limiting, if >125% rated power, with auto-recovery after the overload condition is removed					
	OVER VOLTAGE		15.5 ~ 18.2V		31 ~ 36.5V		62.1 ~ 72.9V	
			Protection type : Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE		Shut down O/P voltage, recovers automatically after temperature goes down					
ENVIRONMENT	WORKING TEMP.		-30 ~ +70℃ (Refer to "Derating Curve")					
	WORKING HUMIDITY		20 ~ 95% RH non-condensing					
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT		±0.05%/℃ (0 ~ 50℃)					
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC (Note 9)	SAFETY STANDARDS		IEC62368-1, UL62368-1, EAC TP TC 004 approved; Meet BS EN/EN62368-1					
	WITHSTAND VOLTAGE		I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH					
	EMC EMISSION		Parameter		Standard		Test Level / Note	
			Conducted		BS EN/EN55032 (CISPR32) / FCC PART15 (CISPR22)		Class B	
			Radiated		BS EN/EN55032 (CISPR32) / FCC PART15 (CISPR22)		Class B	
			Harmonic Current		BS EN/EN61000-3-2		-----	
			Voltage Flicker		BS EN/EN61000-3-3		-----	
	EMC IMMUNITY		BS EN/EN55024					
			Parameter		Standard		Test Level / Note	
			ESD		BS EN/EN61000-4-2		Level 3, 8KV air ; Level 2, 4KV contact	
			Radiated		BS EN/EN61000-4-3		Level 2, 3V/m	
			EFT / Burst		BS EN/EN61000-4-4		Level 2, 1KV	
			Surge		BS EN/EN61000-4-5		Level 2, 1KV/Line-Line,Level 3, 2KV/Line-Earth	
			Conducted		BS EN/EN61000-4-6		Level 2, 3Vrms	
Magnetic Field			BS EN/EN61000-4-8		Level 1, 1A/m			
Voltage Dips and Interruptions			BS EN/EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
OTHERS	MTBF		1600.7K hrs min. Telcordia SR-332 (Bellcore) ; 170.6K hrs min. MIL-HDBK-217F (25℃)					
	DIMENSION		192*178*45.5mm (L*W*H)					
	PACKING		1.15Kg; 10pcs/12.5Kg /1.34CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Peak current or peak power up to 3 seconds is provided. 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor. 4. Tolerance : includes set up tolerance, line regulation and load regulation. 5. Line regulation is measured from low line to high line at rated load. 6. Load regulation is measured from 0% to 100% rated load. 7. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time. 8. Derating may be needed under low input voltages. Please check the derating curve for more details. 9. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 10. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx							




180W Level VI Desktop Type Power Supply

ENP-180 series


■ Block Diagram

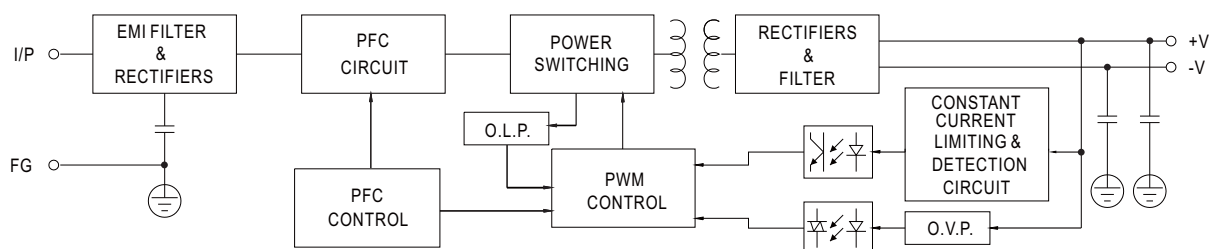

■ Derating Curve

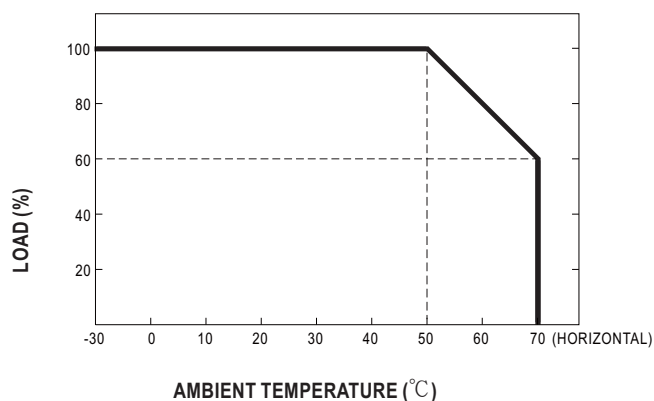

■ Static Characteristics

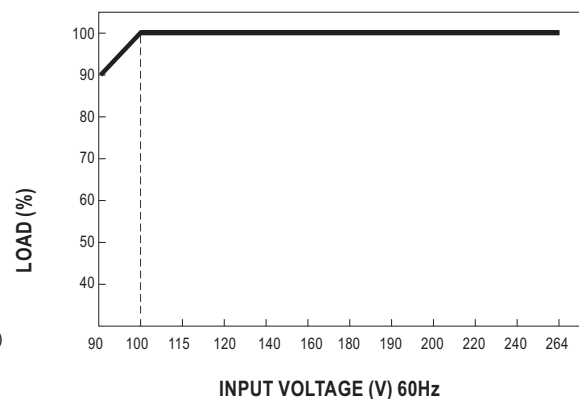




180W Level VI Desktop Type Power Supply

ENP-180 series

Mechanical Specification

(Unit: mm , tolerance ± 1 mm)

Case No. 252

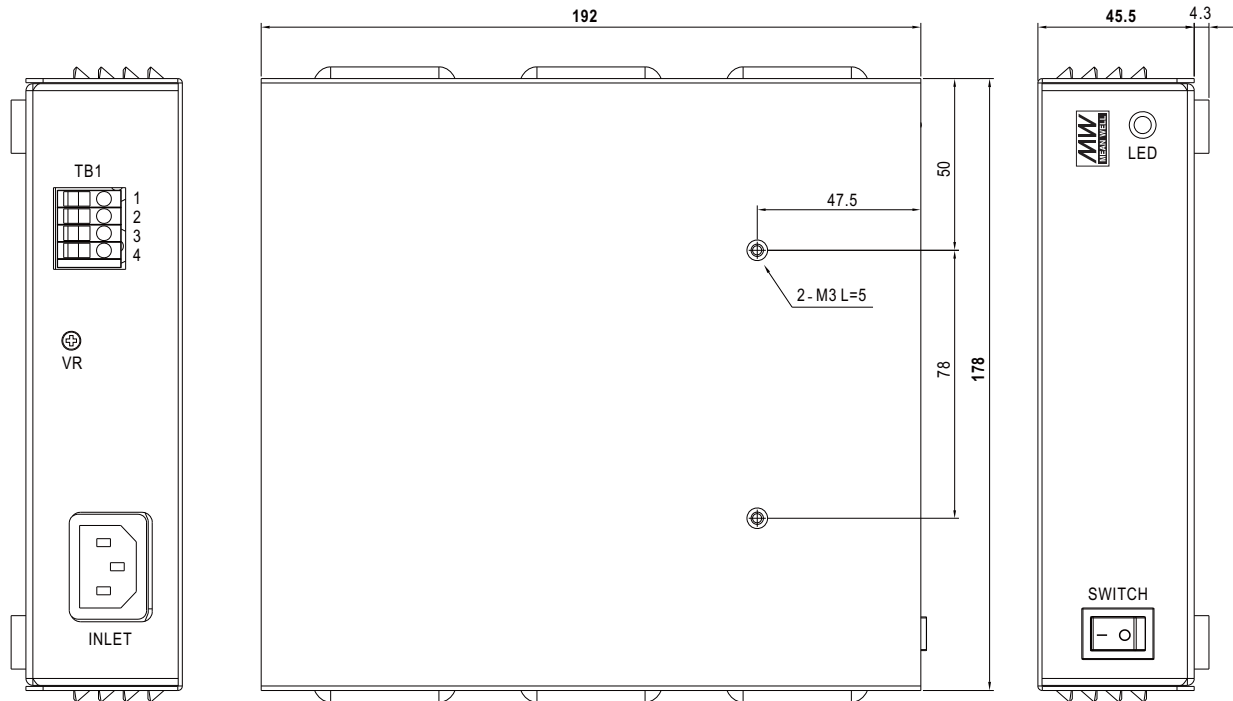

Terminal Pin No. Assignment (TB1):

Pin No.	Assignment
1,2	+V
3,4	-V

Note: Please use wires with a cross section of 0.5 - 4.0 mm² (12~20AWG) for connection.
Recommended wires strip length is 9 mm and screw torque is 4.0 lb-inch (0.4~0.5Nm).

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>