



360W AC-DC High Reliability Industrial Adaptor

GST360A series

User's Manual



Video



■ Features

- Global certificates
- **450W peak power(3 sec.)**
- Universal AC input / Full range
- 3 pole AC inlet IEC320-C14, Class I power unit
- Built-in active PFC function
- No load power consumption<0.5W
- **Energy efficiency Level VI**
- Comply with international energy-saving standards
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design with -30~+70°C working temperature
- Fully enclosed plastic case
- LED indicator for power on
- 3 years warranty

■ Description

GST360A is a highly reliable, 360W desktop style single-output green adaptor series. This product is a class I power unit (with FG), equipped with a standard IEC320-C14 AC inlet and adopting the input range from 85 VAC to 264VAC. The entire series supplies different models with output voltages ranging between 12VDC and 55VDC that can satisfy the demands for various types of consumer electronic devices.

With the efficiency up to 95.0% and the extremely low no-load power consumption below 0.5W, GST360A is compliant with USA EISA 2007/DoE, Canada NRCAN. The supreme feature allows the adaptor to save the energy when it is either under the operating mode or the standby mode. The entire series utilizes the 94V-0 flame retardant plastic case. GST360A is certified for the international safety regulations.

■ Model Encoding

GST 360A 12 -C8P

- DC connector type { C8P: Standard model, 8 pin connector for 12~15V
C6P: Standard model, 6 pin connector for 24~55V
Other options available by customer requested (see Page 4)
- Output voltage
- IEC320-C14 AC inlet
- Rated wattage
- Series name

■ Applications

- Consumer electronic devices
- Telecommunication devices
- Office facilities
- Industrial equipments
- 3D printer
- Game console
- Vision mixer
- Power sourcing equipment of PoE

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



SPECIFICATION


ORDER NO.		GST360A12-C8P	GST360A15-C8P	GST360A24-C6P	GST360A36-C6P	GST360A48-C6P	GST360A55-C6P	
OUTPUT	SAFETY MODEL NO.		GST360A12	GST360A15	GST360A24	GST360A36	GST360A48	GST360A55
	DC VOLTAGE Note.2		12V	15V	24V	36V	48V	55V
	RATED CURRENT		27.5A	22.7A	15A	10A	7.5A	6.55A
	CURRENT RANGE		0 ~ 27.5A	0 ~ 22.7A	0 ~ 15A	0 ~ 10A	0 ~ 7.5A	0 ~ 6.55A
	POWER	Rated (max.)	330W	340.5W	360W	360W	360W	360W
		Peak (3sec.)	415W	425W	450W	450W	450W	450W
	RIPPLE & NOISE (max.) Note.3		120mVp-p	120mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
	VOLTAGE TOLERANCE Note.4		± 5.0%	± 5.0%	± 3.0%	± 2.0%	± 2.0%	± 2.0%
	LINE REGULATION Note.5		± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%
	LOAD REGULATION		± 5.0%	± 5.0%	± 3.0%	± 2.0%	± 2.0%	± 2.0%
SETUP, RISE TIME Note.6		2000ms, 50ms / 230VAC 2000ms, 50ms / 115VAC at full load						
HOLD UP TIME (Typ.)		8ms / 230VAC 8ms / 115VAC at full load						
INPUT	VOLTAGE RANGE Note.7		85 ~ 264VAC 120 ~ 370VDC					
	FREQUENCY RANGE		47 ~ 63Hz					
	POWER FACTOR (Typ.)		PF>0.95 / 230VAC PF>0.98 / 115VAC at full load					
	EFFICIENCY (Typ.)		91%	92%	93%	94%	95%	95%
	AC CURRENT (Typ.)		3.8A / 115VAC 2A / 230VAC					
	INRUSH CURRENT (max.)		Cold start 95A / 115VAC 120A / 230VAC					
	LEAKAGE CURRENT(max.)		1.5mA / 240VAC					
PROTECTION	OVERLOAD	135 ~ 155% rated output power						
		Protection type : Hiccup mode, recovers automatically after fault condition is removed for 12 ~ 36V						
		Shut down o/p voltage, re-power on to recover for 48V and 55V						
	OVER VOLTAGE	105 ~ 135% rated output voltage						
		Protection type : Shut down o/p voltage, re-power on to recover						
OVER TEMPERATURE		Shut down o/p voltage, re-power on to recover						
ENVIRONMENT	WORKING TEMP.		-30 ~ +70℃ (Refer to "Derating Curve")					
	WORKING HUMIDITY		20% ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT		± 0.03% / °C (0~40℃)					
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
	OPERATING ALTITUDE Note.8		5000 meters					
	OVER VOLTAGE CATEGORY		II ; According to UL62368-1, BS EN/EN62368-1; altitude up to 5000 meters					
SAFETY & EMC (Note. 9)	SAFETY STANDARDS		UL62368-1, CSA C22.2 No.62368-1, Dekra BS EN/EN62368-1, BSMI CNS15598-1, CCC GB4943, AS/NZS 62368.1, PSE J62368-1, BIS IS13252, KC 62368-1, EAC TP TC 004 approved					
	WITHSTAND VOLTAGE		I/P-O/P: 3KVAC I/P-F/G: 2KVAC O/P-F/G: Short					
	ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25℃/ 70% RH					
	EMC EMISSION	Parameter	Standard				Test Level / Note	
		Conducted emission	BS EN/EN55032(CISPR32),FCC PART 15 / CISPR22 CAN ICES-3(B)/NMB-3(B),CNS15936,GB17625.1 EAC TP TC 020,MSIP KN32				Class B	
		Radiated emission	BS EN/EN55032(CISPR32),FCC PART 15 / CISPR22 CAN ICES-3(B)/NMB-3(B),CNS15936,GB17625.1 EAC TP TC 020,MSIP KN32				Class B	
		Harmonic current	BS EN/EN61000-3-2,GB9254				Class A	
		Voltage flicker	BS EN/EN61000-3-3				-----	
	EMC IMMUNITY	Parameter	Standard				Test Level /Note	
		ESD	BS EN/EN61000-4-2				Level 4, 15KV air; Level 4, 8KV contact	
		RF field susceptibility	BS EN/EN61000-4-3				Level 2, 3V/m	
		EFT bursts	BS EN/EN61000-4-4				Level 2, 1KV	
		Surge susceptibility	BS EN/EN61000-4-5				Level 3, 1KV/Line-Line , 2KV/Line-FG	
		Conducted susceptibility	BS EN/EN61000-4-6				Level 2, 3V	
		Magnetic field immunity	BS EN/EN61000-4-8				Level 2, 3A/m	
Voltage dips , interruption		BS EN/EN61000-4-11				>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods		
OTHERS	MTBF		2068.5K hrs min. Telcordia SR-332 (Bellcore) ; 269K hrs min. MIL-HDBK-217F (25℃)					
	DIMENSION		220*95*46mm (L*W*H)					
	PACKING		1.4Kg; 8pcs/12Kg/0.82CUFT					
CONNECTOR	PLUG		See page 4 ; Other type available by customer requested					
	CABLE		See page 4 ; Other type available by customer requested					
NOTE		1. All parameters are specified at 230VAC input, rated load, 25℃ 70% RH ambient. 2. DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1μF & 47μF capacitor. 4. Tolerance: includes set up tolerance, line regulation, load regulation. 5. Line regulation is measured from low line to high line at rated load. 6. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time. 7. Derating may be needed under low input voltage. Please check the derating curve for more details. 8. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 9. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx						




360W AC-DC High Reliability Industrial Adaptor

GST360A series

Derating Curve

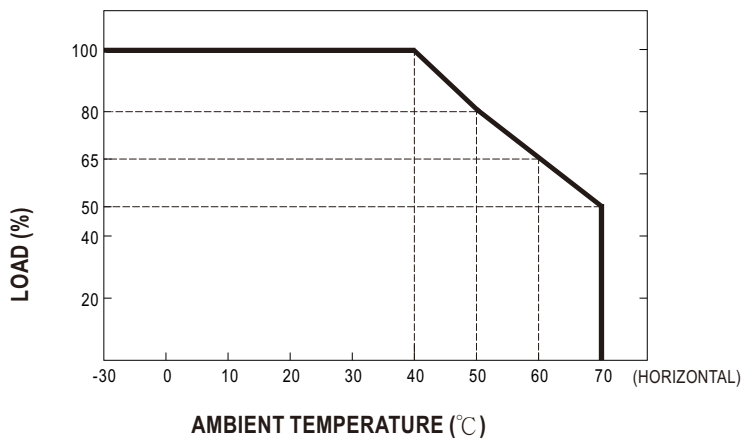


Static Characteristics

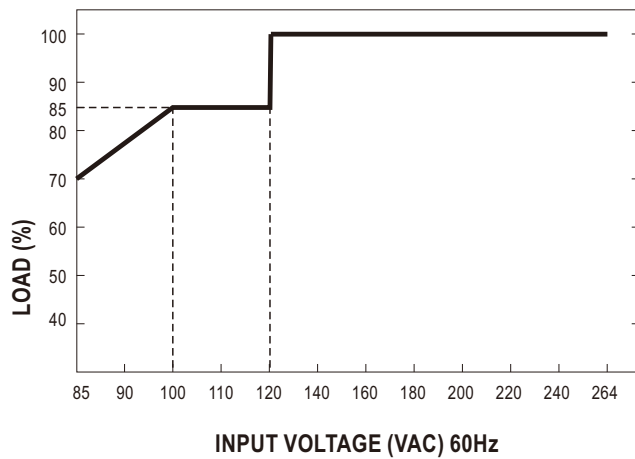

Mechanical Specification

(Unit: mm , tolerance ± 1 mm)

Case No. GS280A

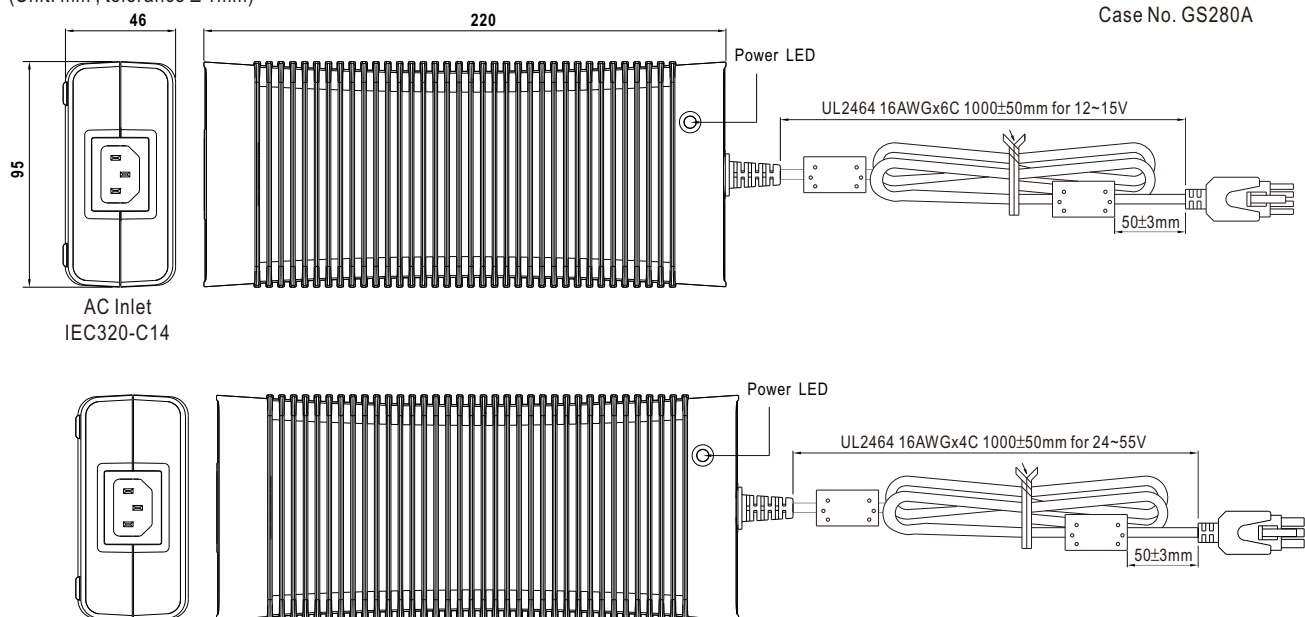



360W AC-DC High Reliability Industrial Adaptor

GST360A series


■ DC output plug

Standard models(In stock): -V connected to AC FG


Optional models(By request): -V not connected to AC FG

◎ Standard plug:

C8P : MOLEX 39-01-2080 equivalent for 12~15V

C8P	Pin Assignment	
	PIN NO.	OUTPUT
	1,2,3,4	+Vo
	5,6,7,8	-Vo

C6P : MOLEX 39-01-2060 equivalent for 24~55V


C6P	Pin Assignment	
	PIN NO.	OUTPUT
	1,2,3	+Vo
	4,5,6	-Vo

◎ Optional DC plug:

MIC4: NEUTRIK XLR NC4FX equivalenten for 36~55V

MIC4	Type No.	Pin Assignment	
		PIN No.	Output
	MIC4	1	+Vo
		2	+Vo
		3	-Vo
		4	-Vo

C4P: AMP 1-480702-0 (6.35mm) equivalent for 36~55V

C4P	Type No.	Pin Assignment	
		PIN No.	Output
	C4P	1	+Vo
		2	+Vo
		3	-Vo
		4	-Vo

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>