






1600W AC/DC High Reliable Industrial Enclosed Type Power Supply **NSP-1600 series**

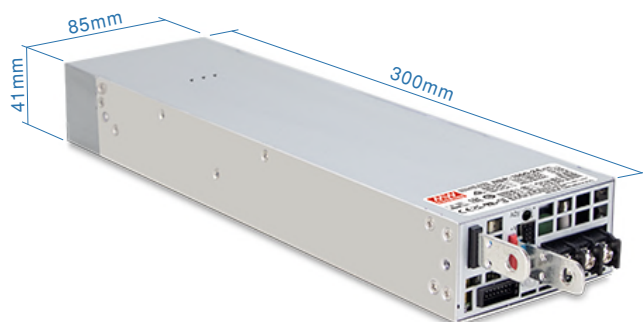

Front



Back



■ Features

- 90~264Vac input with PFC
- **Output voltage 40~125% programmable** (15~125% by request)
- Built-in **CANBus protocol**
- -20~+70°C wide range operation temperature
- Built-in **constant current** limiting circuit
- High efficiency up to 92.5%
- Built-in remote ON-OFF control / Remote Sense / 12Vaux power / DC OK signal / OTP alarm signal
- Built-in intelligent fan speed control
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Design refer to SEMI F47 at 200Vac
- **5 years warranty**

■ Applications

- Factory control or automation apparatus
- Test and measurement instrument
- Laser related machine
- Aging facility
- Digital broadcasting
- Constant current source

■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

NSP-1600 is a 1.6KW single output enclosed type AC/DC power supply with a 1U low profile and a high power density up to 25W/inch³. This series operates for 90~264Vac input voltage and offers the models with the DC output mostly demanded from the industry. Each model is cooled by the thermostatically controlled fan. Moreover, NSP-1600 provides vast design flexibility by equipping various built-in functions such as the output programming, remote ON-OFF control, auxiliary power, etc.

■ Model Encoding

NSP - 1600 - 48

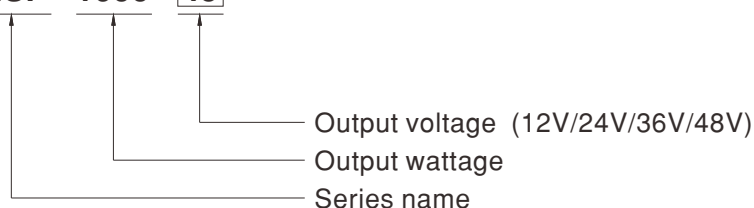





SPECIFICATION		NSP-1600-12		NSP-1600-24		NSP-1600-36		NSP-1600-48		
OUTPUT										
DC VOLTAGE		12V		24V		36V		48V		
RATED CURRENT		125A		67A		44.5A		33.5A		
CURRENT RANGE		0 ~ 125A		0 ~ 67A		0 ~ 44.5A		0 ~ 33.5A		
RATED POWER		1500W		1608W		1602W		1608W		
RIPPLE & NOISE (max.)		Note.2	150mVp-p		200mVp-p		250mVp-p		300mVp-p	
VOLTAGE ADJ. RANGE			11.5 ~ 15V		23.5 ~ 30V		35.5 ~ 45V		47.5 ~ 58.8V	
VOLTAGE TOLERANCE		Note.3	± 1.0%		± 1.0%		± 1.0%		± 1.0%	
LINE REGULATION			± 0.5%		± 0.5%		± 0.5%		± 0.5%	
LOAD REGULATION			± 0.5%		± 0.5%		± 0.5%		± 0.5%	
SETUP, RISE TIME		1500ms, 60ms/230Vac at full load								
HOLD UP TIME (Typ.)		16ms / 230Vac at 70% load		10ms / 230Vac at full load						
INPUT										
VOLTAGE RANGE		Note.4	90 ~ 264Vac 250 ~ 400Vdc							
FREQUENCY RANGE		47 ~ 63Hz								
POWER FACTOR (Typ.)		0.97/230Vac at full load								
EFFICIENCY (Typ.)		89%		91%		91.5%		92.5%		
AC CURRENT (Typ.)		Note.4	14A/115Vac 8A/230Vac		15A/115Vac 8.5A/230Vac					
INRUSH CURRENT (Typ.)		COLD START 35A/230Vac								
LEAKAGE CURRENT		<2mA / 230Vac								
PROTECTION										
OVERLOAD		105 ~ 115% rated output power Protection type : Constant current limiting , unit will shut down o/p voltage after 5 sec. After O/P voltage falls, re-power on to recover								
OVER VOLTAGE		15.75 ~ 18.75V		31.5 ~ 37.5V		47.2 ~ 56.3V		63 ~ 75V		
		Protection type : Shut down o/p voltage, re-power on to recover								
OVER TEMPERATURE		Shut down o/p voltage, recovers automatically after temperature goes down								
FUNCTION										
OUTPUT VOLTAGE PROGRAMMABLE(PV)		Adjustment of output voltage is allowable to 40 ~ 125%(12V: 60~125%) of nominal output voltage ; 15~125% by request. Please refer to the Function Manual.								
REMOTE CONTROL		By electrical signal or dry contact Power ON:short Power OFF:open. Please refer to the Function Manual								
REMOTE SENSE		Compensate voltage drop on the load wiring up to 0.5Vdc. Please refer to the Function Manual								
AUXILIARY POWER		12Vaux @ 0.8A								
ALARM SIGNAL		Isolated signal output for T-alarm and DC OK								
CANBus INTERFACE		Communication provides functions such as control, setting and monitoring								
		Note.6	Built-in intelligent fan speed control detect by PSU'S internal temperature							
FAN NOISE (Typ.)		10% load with Ta=25℃	38dB		38dB		38dB		38dB	
		70% load with Ta=25℃	45dB		38dB		38dB		38dB	
ENVIRONMENT										
WORKING TEMP.		-20 ~ +70℃ (Refer to "Derating Curve")								
WORKING HUMIDITY		20 ~ 90% RH non-condensing								
STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing								
TEMP. COEFFICIENT		± 0.03%/℃ (0 ~ 50℃)								
VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes								
SAFETY & EMC (Note 7)										
SAFETY STANDARDS		UL62368-1, CAN/CSA C22.2 No. 62368-1, TUV BS EN/EN62368-1, BSMI CNS15598-1, BIS IS 13252(Part 1):2010/ IEC 60950-1 : 2005 (except for 48V), AS/NZS62368.1, EAC TP TC 004 approved								
WITHSTAND VOLTAGE		I/P-O/P:3KVac I/P-FG:2KVac O/P-FG:1.5KVac								
ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500Vdc / 25℃ / 70% RH								
EMC EMISSION		Parameter			Standard			Test Level / Note		
		Conducted			BS EN/EN55032(CISPR32),CNS 15936			Class B(CISPR32)/Class A(CNS 15936)		
		Radiated			BS EN/EN55032(CISPR32),CNS 15936			Class A(CISPR32 & CNS 15936)		
		Harmonic Current			BS EN/EN61000-3-2			Class A		
		Voltage Flicker			BS EN/EN61000-3-3			-----		
EMC IMMUNITY		BS EN/EN55024, BS EN/EN61000-6-2, BSMI CNS15598-1, design refer to SEMI F47 at 200Vac								
		Parameter			Standard			Test Level / Note		
		ESD			BS EN/EN61000-4-2			Level 3, 8KV air ; Level 2, 4KV contact		
		Radiated			BS EN/EN61000-4-3			Level 3		
		EFT / Burst			BS EN/EN61000-4-4			Level 3		
		Surge			BS EN/EN61000-4-5			Level 4, 2KV/Line-Line 4KV/Line-Earth		
		Conducted			BS EN/EN61000-4-6			Level 3		
		Magnetic Field			BS EN/EN61000-4-8			Level 4		
		Voltage Dips and Interruptions			BS EN/EN61000-4-11			>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods		
OTHERS										
MTBF		684.7K hrs min. Telcordia SR-332 (Bellcore) ; 69.2K hrs min. MIL-HDBK-217F (25℃)								
DIMENSION		300*85*41mm (L*W*H)								
PACKING		1.8Kg:6pcs/11.3Kg/1.25CUFT								



- All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature.
 - Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
 - Tolerance : includes set up tolerance, line regulation and load regulation.
 - Derating may be needed under low input voltages. Please check the derating curve for more details.
 - If use PV signal to adjust Vo, under certain operation conditions, ripple noise of Vo might go over rating defined in this specification.
 - FAN noise test set up according to ISO-7779.
 - The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 720mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)
 - The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- ※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>



1600W AC/DC High Reliable Industrial Enclosed Type Power Supply

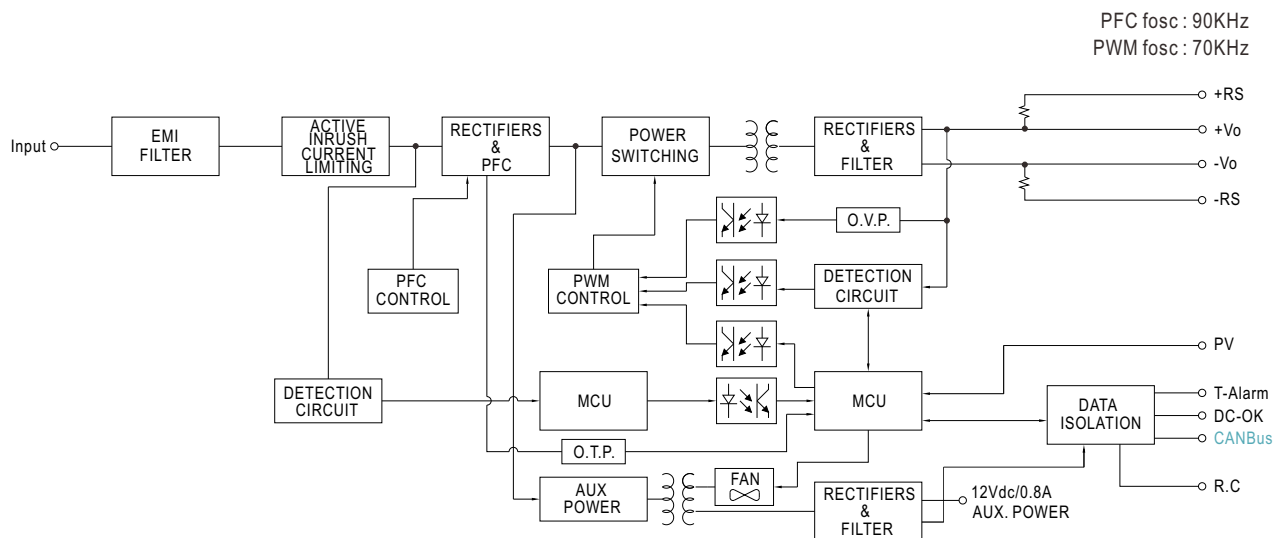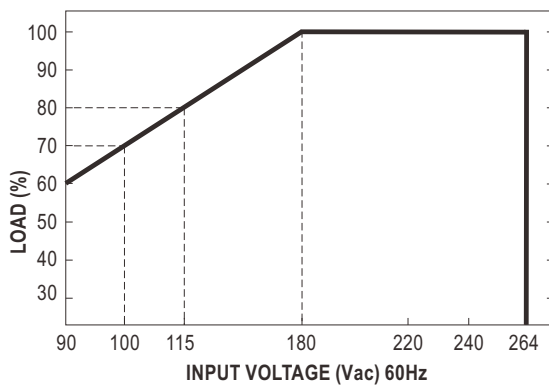NSP-1600 series**Block Diagram****Static Characteristics**

INPUT \ MODEL	12V	24V	36V	48V
180~264Vac	1500W 125A	1608W 67A	1602W 44.5A	1608W 33.5A
115Vac	1200W 100A	1286W 53.6A	1282W 35.6A	1286W 26.8A
100Vac	1050W 87.5A	1126W 46.9A	1121W 31.15A	1126W 23.45A
90Vac	900W 75A	965W 40.2A	961W 26.7A	965W 20.1A

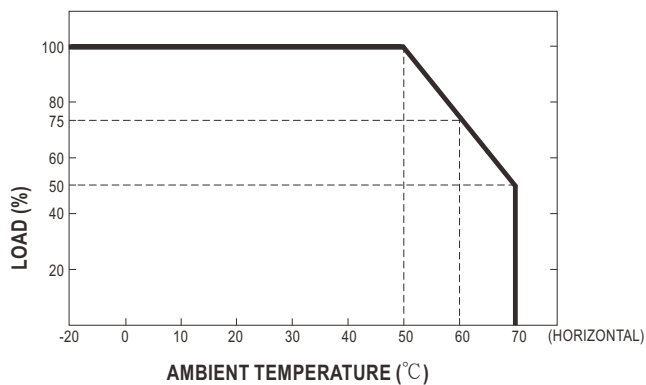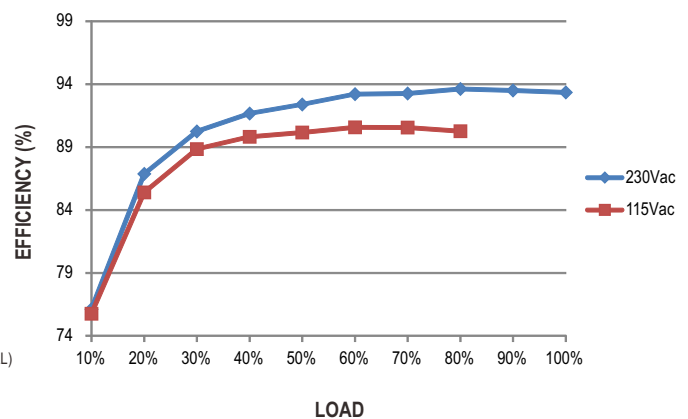Derating Curve**Efficiency vs Load (48V Model)**


© The curve above is measured at 115/230Vac.



■ Function Manual

1. Output Voltage Programming (P.V)

※ In addition to the adjustment via the built-in potentiometer, the output voltage can be trimmed by applying External Voltage.

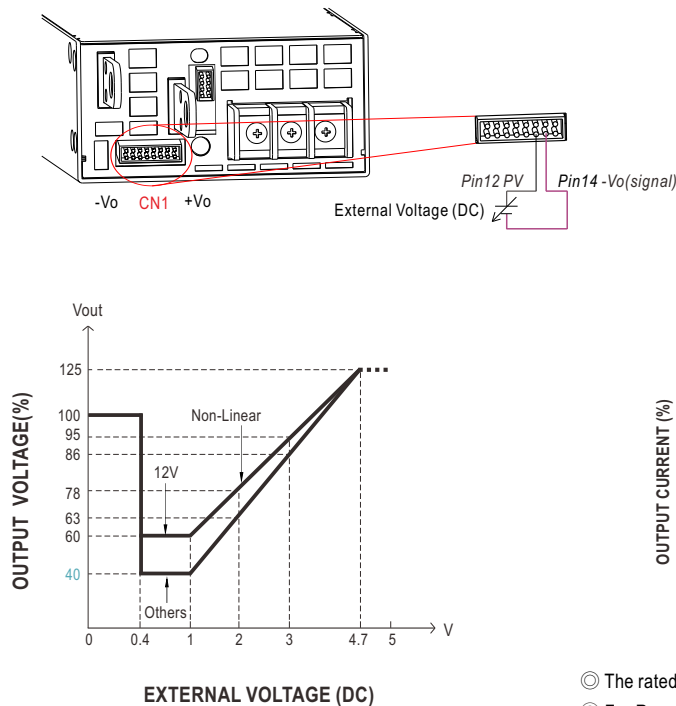


◎ The rated current should change with the Output Voltage Programming accordingly.

◎ For Remote Sense / Local Sense, please refer to "Voltage Drop Compensation" section.

2. Remote Control

※ The power supply can be turned ON/OFF individually or along with other units by using the "Remote Control" function.

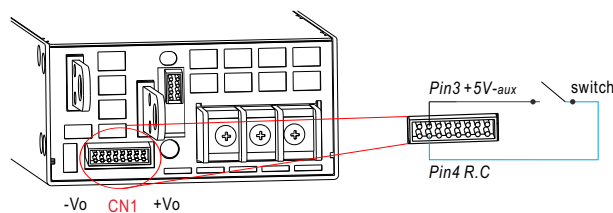

PSU Vo Status	Between +5V-aux(Pin 3) and R.C(Pin 4)
Power ON	Switch Short
Power OFF	Switch Open

R.C. by external switch.	R.C. by user's optocoupler control module.	R.C. by user's Relay control module.
---------------------------------	---	---




1600W AC/DC High Reliable Industrial Enclosed Type Power Supply

NSP-1600 series

3. Voltage Drop Compensation

3.1 Remote Sense


※ The Remote Sense compensates voltage drop on the load wiring up to 0.5Vdc

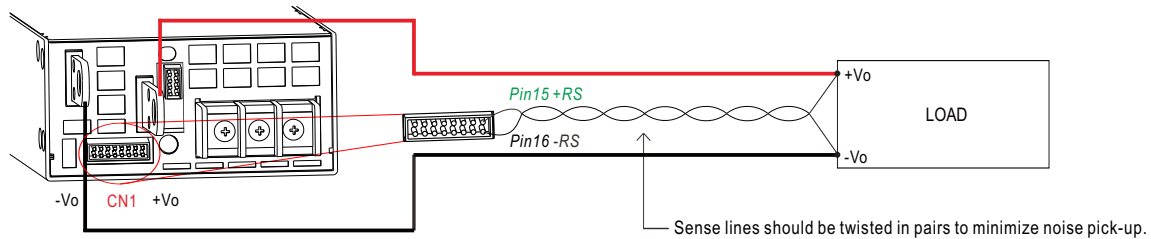

◎ The +RS signal should be connected to the positive terminal of the load whereas -RS signal to the negative terminal.


3.2 Local Sense

※ The +RS, -RS have to be connected to the +Vo(signal), -Vo(signal), respectively, as the following diagram, in order to get the correct output voltage if Remote Sense is not used.

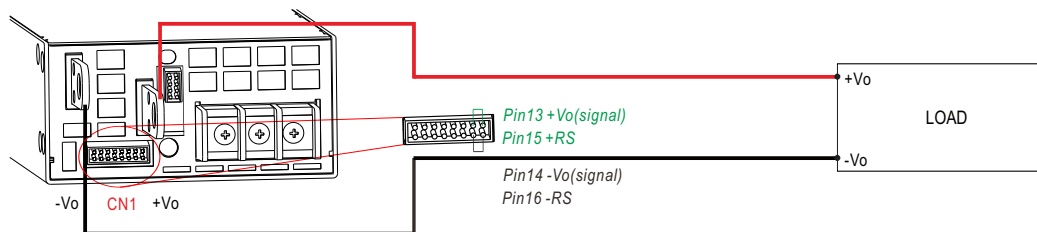

4. Alarm Signal Output

※ There are 2 alarm signals, DC OK and T-ALARM, in TTL signal form, on CN1. These signals are isolated from output.
The maximum sink current is 10mA.

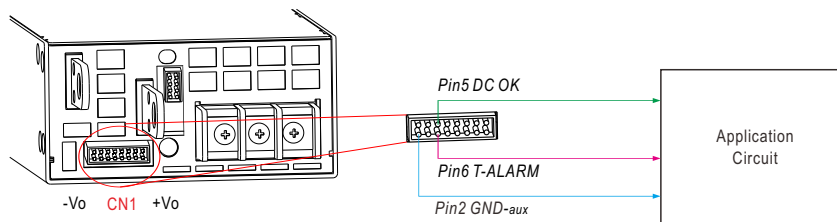

DC OK Fail signal	Power Supply Status
"High" > 3.5~5.5V	Vout ≤ 77%±5%
"Low" < -0.5~0.5V	Vout ≥ 80%±5%


T-ALARM	Power Supply Status
"High" > 3.5~5.5V	OFF(OTP or Fan Fail)
"Low" < -0.5~0.5V	ON(Normal Work)

5. CANBus Communication Interface

NSP-1600 supports CAN 2.0B with maximum 250KHz bus speed, allowing information reading, status monitoring, output trimming, etc.
For details, please refer to the User's Manual.


Mechanical Specification(Unit: mm , tolerance $\pm 0.5\text{mm}$)

Case No.296A

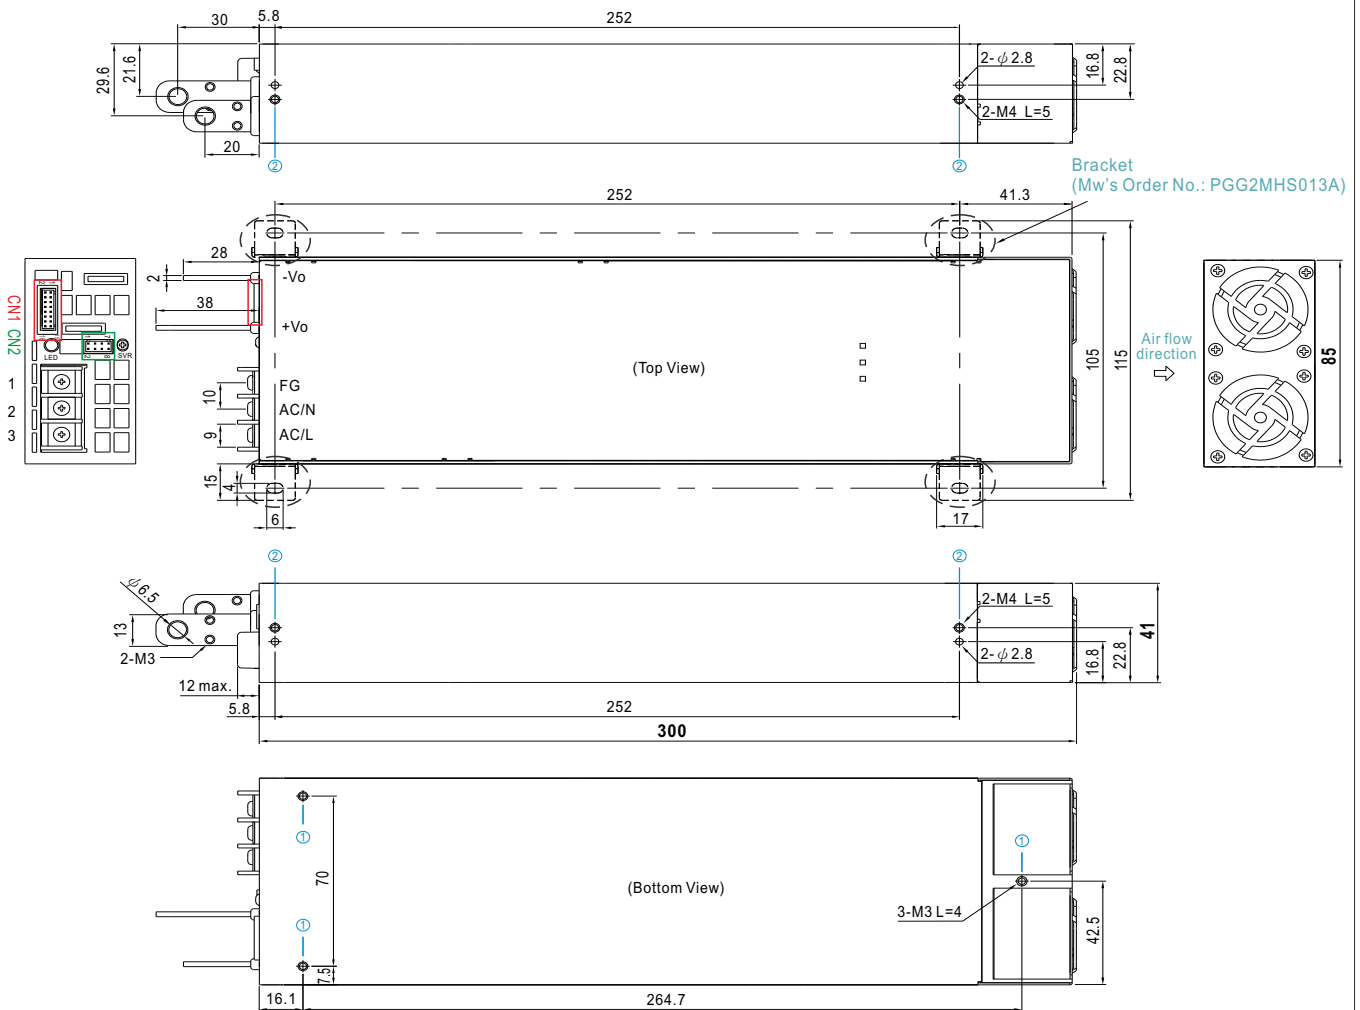


※ Mounting Instruction

Hole No.	Recommended Screw Size	MAX. Penetration Depth L	Recommended mounting torque
①	M3	4mm	6~8Kgf-cm
②	M4	5mm	7~10Kgf-cm

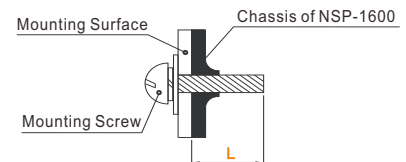

※ Control Pin No. Assignment(CN1) : HRS DF11-16DP-2DS or equivalent



Mating Housing	HRS DF11-16DS or equivalent
Terminal	HRS DF11-16SC or equivalent

Pin No.	Function	Description
1	+12V-aux	Auxiliary voltage output, 10.6~13.2Vdc, referenced to GND-aux (pin2). The maximum load current is 0.8A. This output has the built-in "Oring diodes" and is not controlled by "Remote ON-OFF".
2	GND-aux	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+Vo & -Vo).
3	+5V-aux	This pin is use for remote ON-OFF usage only.
4	R.C	The unit can turn the output ON/OFF by electrical signal or dry contact between Remote ON/OFF and +5V-aux. (Note.2) Short (4.5 ~ 5.5Vdc) : Power ON ; Open (-0.5 ~ 0.5Vdc) : Power OFF ; The maximum input voltage is 5.5Vdc.
5	DC-OK	High (3.5 ~ 5.5Vdc) : When the Vout $\leq 77\% \pm 5\%$. Low (-0.5 ~ 0.5Vdc) : When Vout $\geq 80\% \pm 5\%$. The maximum sourcing current is 10mA and only for output. (Note.2)
6	T-ALARM	High (3.5 ~ 5.5Vdc) : When the internal temperature exceeds the limit of temperature alarm, or when Fan fails. Low (-0.5 ~ 0.5Vdc) : When the internal temperature is normal, and when Fan works normally. The maximum sourcing current is 10mA and only for output(Note.2)
7,8,9	A0,A1,A2	CANBus interface address lines. (Note.1)
10,11	NC	Retain for future use.
12	PV	Connection for output voltage programming. (Note.1)
13	+Vo(Signal)	Positive output voltage signal. It is for local sense; it cannot be connected directly to the load.
14	-Vo(Signal)	Negative output voltage signal. It is for local sense and certain function reference; it cannot be connected directly to the load.
15	+RS	Positive sensing for remote sense.
16	-RS	Negative sensing for remote sense.

Note1: Non-isolated signal, referenced to [-Vo(signal)].

Note2: Isolated signal, referenced to [GND-aux].



1600W AC/DC High Reliable Industrial Enclosed Type Power Supply

NSP-1600 series


※ LED Status Indicators

LED	Description
Green	The power supply functions normally.
Red	The LED will present a constant red light when the abnormal status (OTP, OLP, fan fail) arises.
Red (Flashing)	The LED will flash with the red light when the internal temperature reaches 60°C; under this condition, the unit still operates normally without entering OTP. (In the meantime, an alarm signal will be sent out through the CANBus interface.)

※ AC Input Terminal Pin No. Assignment

Pin No.	Assignment	Diagram	Screw thread	Maximum mounting torque
1	FG $\perp$		M3.5	8Kgf-cm
2	AC/N			
3	AC/L			

※ Control Pin No. Assignment(CN2) : HRS DF11-8DP-2DS or equivalent




Mating Housing	HRS DF11-8DS or equivalent
Terminal	HRS DF11-**SC or equivalent

Pin No.	Function	Description
1,2,3,4	NC	For standard model: Retain for future use.
5,6	-Vo (Signal)	Negative output voltage signal. It is for local sense and certain function reference; it cannot be connected directly to the load.
7	CANH	For CANBus model: Data line used in CANBus interface. (Note)
8	CANL	For CANBus model: Data line used in CANBus interface. (Note)

Note: Isolated signal, referenced to [GND-aux].

■ Accessory List

No.	Item	Quantity
1	Control function interface(CN1) mating wire along with NSP-1600 (standard accessory)	1pcs/per model
2	Bracket Mw's Order No.: PGG2MHS013A (By request accessory, should ordered seperately)	4pcs/per model (Please refer to Installation Diagram)





1600W AC/DC High Reliable Industrial Enclosed Type Power Supply

NSP-1600 series

■ Installation Diagram

