




75W Reliable Dual Output Medical Grade

RPD-75 series

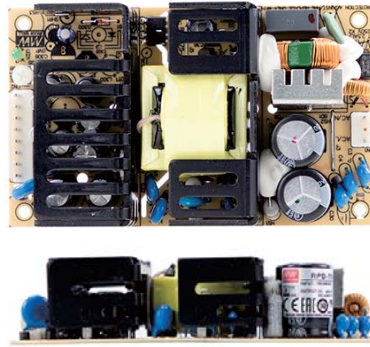

■ Features

- 5"×3" compact size
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1 and IEC/BS EN/EN60601-1
- Suitable for BF application with appropriate system consideration
- Free air convection for rated power and 23.5CFM forced air convection for peak load
- EMI class B for class I configuration
- Extremely low leakage current
- Protections: Short circuit / Overload / Over voltage
- Lifetime > 140K hours
- 3 years warranty

■ Applications

- Oral irrigator
- Hemodialysis machine
- Medical computer monitors
- Sleep apnea devices

■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

RPD-75 is a 75W highly reliable green PCB type medical power supply with a high power density on the 5" by 3" footprint. It accepts 90~264VAC input and offers dual output voltages .

RPD-75 is able to be used for Class I (with FG) system design. The extremely low leakage current is less than 150 μ A. In addition, it conforms to international medical regulations (2*MOPP) and EMC BS EN/EN55011.

■ Model Encoding

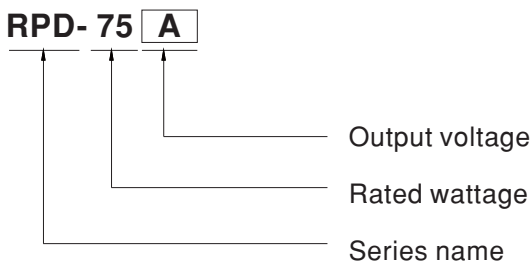



75W Reliable Dual Output Medical Grade

RPD-75 series

SPECIFICATION


| MODEL | RPD-75A | | RPD-75B | | |
|---------------------------|---|--|---|--|------------|
| OUTPUT | OUTPUT NUMBER | CH1 | CH2 | CH1 | CH2 |
| | DC VOLTAGE | 5V | 12V | 5V | 24V |
| | RATED CURRENT | 7A | 3A | 5A | 2A |
| | CURRENT RANGE | 1 ~ 9.5A | 0.3 ~ 4A | 1 ~ 6.8A | 0.2 ~ 2.7A |
| | RATED POWER | 71W | | 73W | |
| | PEAK LOAD (23.5CFM) | 95.5W | | 98.8W | |
| | RIPPLE & NOISE (max.) Note.2 | 80mVp-p | 120mVp-p | 80mVp-p | 120mVp-p |
| | VOLTAGE ADJ. RANGE | CH1: 4.75 ~ 5.5V | | CH1: 4.75 ~ 5.5V | |
| | VOLTAGE TOLERANCE Note.3 | ±2.0% | ±6.0% | ±2.0% | ±6.0% |
| | LINE REGULATION | ±0.5% | ±1.0% | ±0.5% | ±1.0% |
| | LOAD REGULATION | ±1.5% | ±3.0% | ±1.5% | ±3.0% |
| | SETUP, RISE TIME | 500ms, 30ms/230VAC 500ms, 30ms/115VAC at full load | | | |
| HOLD UP TIME (Typ.) | 90ms/230VAC 20ms/115VAC at full load | | | | |
| INPUT | VOLTAGE RANGE | 90 ~ 264VAC 127 ~ 370VDC | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | |
| | EFFICIENCY (Typ.) | 77% | | 79% | |
| | AC CURRENT (Typ.) | 1.5A/115VAC 1A/230VAC | | | |
| | INRUSH CURRENT (Typ.) | COLD START 25A/115VAC 50A/230VAC | | | |
| | LEAKAGE CURRENT Note.4 | Earth leakage current < 150 μA/264VAC , Touch current < 100 μA/264VAC | | | |
| PROTECTION | OVERLOAD | 140 ~ 180% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | |
| | OVER VOLTAGE | Ch1: 5.7 ~ 6.8V Protection type : Shut down o/p voltage, re-power on to recover | | | |
| | | | | | |
| ENVIRONMENT | WORKING TEMP. | -20 ~ +70°C (Refer to "Derating Curve") | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH non-condensing | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 50°C) | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | |
| | OPERATING ALTITUDE Note.5 | 3000 meters | | | |
| SAFETY & EMC (Note 8) | SAFETY STANDARDS | IEC 60601-1:2005, TUV BS EN/ EN 60601-1:2006+A1+A2+A2, ANSI/AAMI ES60601-1:2005+A2 CAN/CSA C22.2 No. 60601-1:2014+A2, EAC TP TC 004 approved; Design refer to BS EN/EN60335-1(by request) | | | |
| | ISOLATION LEVEL | Primary-Secondary:2xMOPP, Primary-Earth:1xMOPP | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC | | | |
| | ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH | | | |
| | EMC EMISSION | Parameter | Standard | Test Level / Note | |
| | | Conducted emission | BS EN/EN55011 (CISPR11) | Class B | |
| | | Radiated emission | BS EN/EN55011 (CISPR11) | Class B | |
| | | Harmonic current | BS EN/EN61000-3-2 | Class A | |
| | | Voltage flicker | BS EN/EN61000-3-3 | ----- | |
| | EMC IMMUNITY | BS EN/EN55035, BS EN/EN60601-1-2 | | | |
| | | Parameter | Standard | Test Level / Note | |
| | | ESD | BS EN/EN61000-4-2 | Level 4, 15KV air ; Level 4, 8KV contact | |
| | | RF field susceptibility | BS EN/EN61000-4-3 | Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz) | |
| | | EFT bursts | BS EN/EN61000-4-4 | Level 3, 2KV | |
| Surge susceptibility | | BS EN/EN61000-4-5 | Level 4, 4KV/Line-FG ; 2KV/Line-Line | | |
| Conducted susceptibility | | BS EN/EN61000-4-6 | Level 3, 10V | | |
| Magnetic field immunity | | BS EN/EN61000-4-8 | Level 4, 30A/m | | |
| Voltage dip, interruption | | BS EN/EN61000-4-11 | 100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods | | |
| OTHERS | MTBF | 2575.6K hrs min. Telcordia SR-332 (Bellcore) ; 569.9K hrs min. MIL-HDBK-217F (25°C) | | | |
| | DIMENSION (L*W*H) | 127*76.2*31mm or 5" * 3" *1.22" inch | | | |
| | PACKING | 0.25Kg; 63pcs/17.3Kg/1.28CUFT | | | |
| NOTE | <p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Touch current was measured from primary input to DC output.</p> <p>5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>6. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.</p> <p>7. Heat Sink HS1,HS2,HS3 can not be shorted.</p> <p>8. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p> | | | | |




75W Reliable Dual Output Medical Grade

RPD-75 series


■ Block Diagram

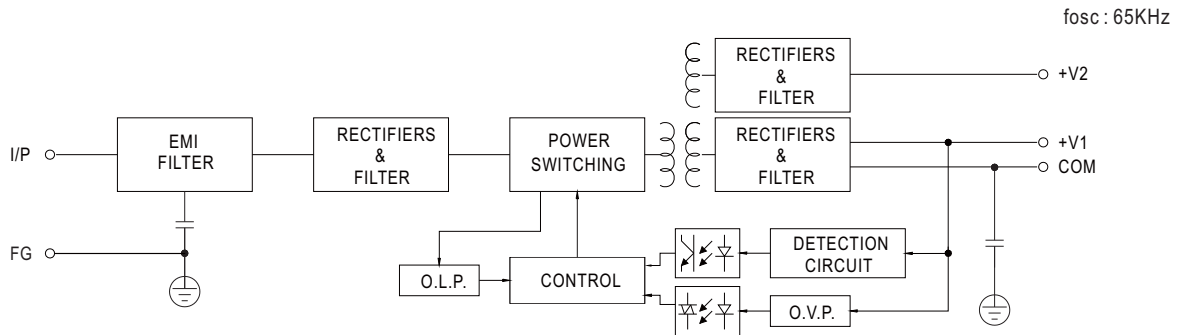

■ Derating Curve

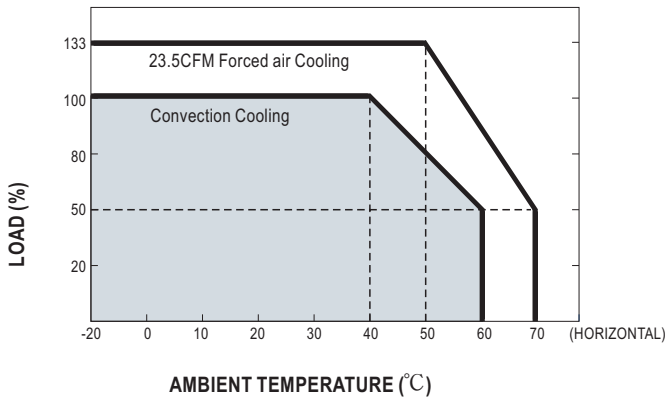

■ Output Derating VS Input Voltage

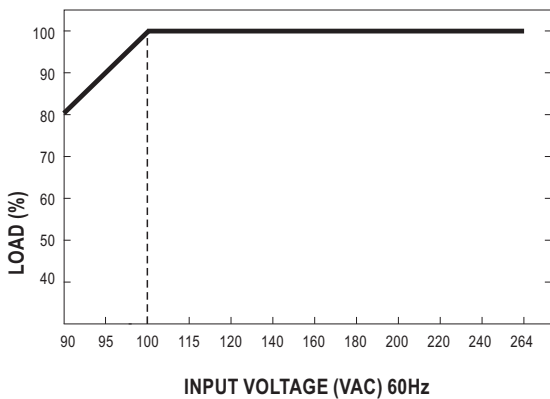




75W Reliable Dual Output Medical Grade

RPD-75 series

Mechanical Specification

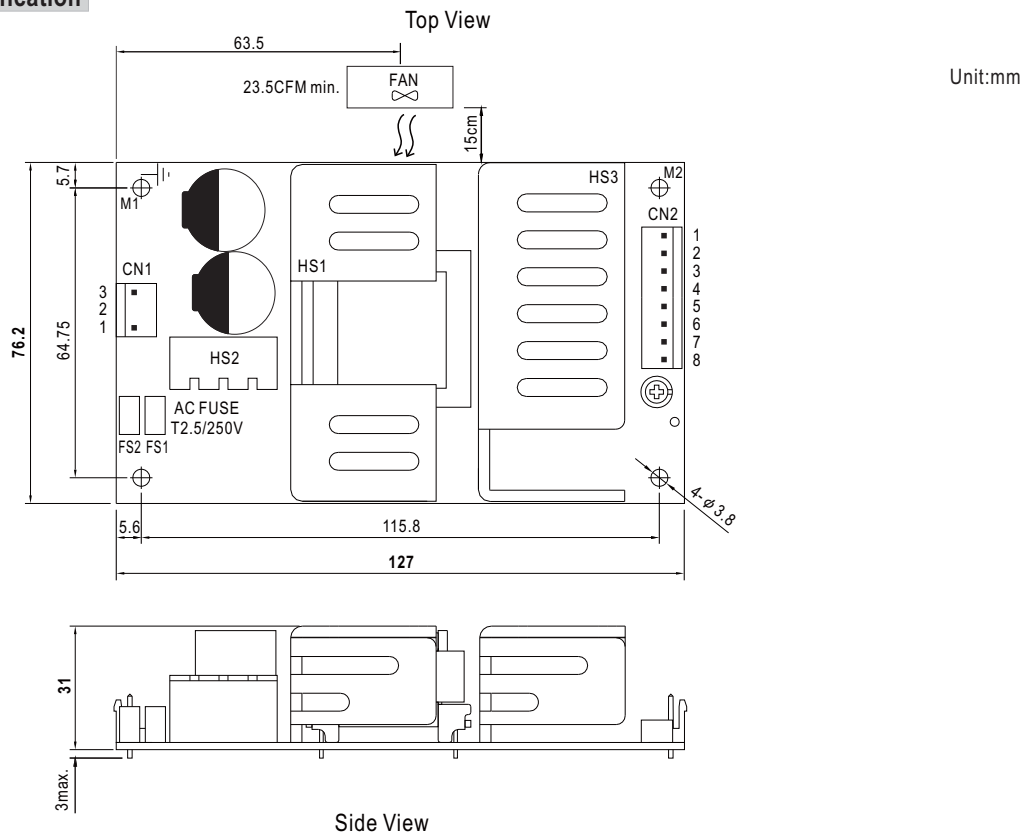

AC Input Connector (CN1) : JST B3P-VH or equivalent

| Pin No. | Assignment | Mating Housing | Terminal |
|---------|------------|--------------------------|-----------------------------------|
| 1 | AC/N | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2 | No Pin | | |
| 3 | AC/L | | |

DC Output Connector (CN2) : JST B8P-VH or equivalent

| Pin No. | Assignment | Mating Housing | Terminal |
|---------|------------|--------------------------|-----------------------------------|
| 1,2 | V1 | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 3,4,5 | COM | | |
| 6,7 | V2 | | |
| 8 | NC | | |

⊥ : Grounding Required



- 1.HS1,HS2,HS3 cannot be shorted.
- 2.M1 is safety ground. For better EMC performance,Please secure an electrical connection between M1,M2 and chassis grounding.

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>