Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

AC↔DC Bidirectional Power Supply with Energy Recycle Function BIC-2200 series

Dimension

L	*	W	*	H	
330	*	140	*	41 (1U)	mm
13	*	5.5	*	1.61 (1U)	inch

User's Manual

Video



Parallel PFC c UL us UL62368-1 TUV BS EN/EN62368-1 BS EN/EN62477-1 EAC TPTC004 CB IEC62368-1 IEC62477-1 CE UKCA

ECO Battery Manufacture EV Household Automate Industrial

Features

- 1U low profile design
- Full digital design with 93% conversion efficiency for both AC/DC and DC/AC conversion
- Ultrafast switching time between AC/DC and DC/AC of 1ms
- CB/TUV/UL 62368-1 and CB/TUV 62477-1 certified
- Active current sharing up to 19800W (up to 9 unit)
- <3% Low THDi in both conversion mode
- Force charging and discharging mode with CANBus model
- Complete protections: Anti-islanding protection, AC fail protection, DC OVP,OLP, OCP, OTP
- Apply BIC-2200 to a three-phase AC power system
- 5 years warranty

Applications

- Battery cell formation & grading
- V2G (Vehicle-to-grid) system
- Marine battery charger module
- Electric scooter or vehicle charger station
- Kinetic energy recovery system
- Electrolysis system
- Wastewater treatment system

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

The BIC-2200 is a 2.2KW bidirectional power supply with energy recycle function. It is fully digital and 1U height designed. It is designed to control the power transferred from AC grid to DC and DC to AC grid for energy recycle. The implementation of a bidirectional power supply of the BIC-2200 allows battery manufactures to charge the battery from AC grid and recycle the DC energy back into AC grid in one single unit. With built-in functions such as active current sharing, remote ON/OFF control and CANBus model available, the BIC-2200 provides vast design flexibility for battery formation & test equipment, V2G(Vehicle-to-grid) system, charging station, laser system and kinetic recovery system.

Model Encoding / Order Information

BIC - 2200 - 12 □

- □ Communication protocol option
- 12 Output voltage(12V/24V/48V/96V)
- 2200 Output wattage
- BIC Series name

Type	Communication Protocol	Note
Blank	None protocol	In Stock
CAN	CANBus protocol	In Stock

Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

AC⇢⇠DC Bidirectional Power Supply with Energy Recycle Function BIC-2200 series

SPECIFICATION

AC to DC Direction	MODEL		BIC-2200-12	BIC-2200-24	BIC-2200-48	BIC-2200-96
	OUTPUT	DC VOLTAGE	12V	24V	48V	96V
		RATED CURRENT	180A	90A	45A	22.5A
		RATED POWER	2160W			
		FULL POWER VOLTAGE RANGE	12 ~ 15V	24 ~ 28V	48 ~ 65V	96 ~ 112V
		RIPPLE & NOISE (max.) Note.2	160mVp-p	260mVp-p	300mVp-p	480mVp-p
		VOLTAGE ADJ. RANGE	10 ~ 15V	19 ~ 28V	38 ~ 65V	76 ~ 112V
		CURRENT RANGE	0 ~ 180A	0 ~ 90A	0 ~ 45A	0 ~ 22.5A
		VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%	±1.0%
		LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%
		LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%
		SETUP, RISE TIME	1800ms, 60ms/230VAC at full load			
	INPUT	AC VOLTAGE RANGE	180 ~ 264VAC			
		FREQUENCY RANGE	47 ~ 63Hz			
		POWER FACTOR (Typ.)	0.98/230VAC at full load			
		EFFICIENCY (Typ.) Note.5	90%	93%	93%	93%
		AC CURRENT (Typ.)	11A/230VAC			
		INRUSH CURRENT (Typ.)	COLD START 35A/230VAC			
		LEAKAGE CURRENT	<2mA/230VAC			
		TOTAL HARMONIC DISTORTION	<3%(@load=100%/230VAC)			
DC to AC Direction	INPUT (Note.4)	RATED INPUT POWER	1800W			
		FULL POWER VOLTAGE RANGE	12 ~ 15V	24 ~ 28V	48 ~ 65V	96 ~ 112V
		DC VOLTAGE RANGE	10 ~15V	19 ~ 28V	38 ~ 65V	76 ~ 112V
		MAX. INPUT CURRENT	150A	75A	37.5A	18.75A
	OUTPUT	OUTPUT POWER (Typ.) (@240V)	1685W	1720W	1720W	1685W
		VOLTAGE RANGE	180 ~ 264VAC determined by AC main			
		FREQUENCY RANGE	47 ~ 63Hz determined by AC main			
		AC CURRENT (Typ.)	7.5A/230VAC			
		POWER FACTOR (Typ.)	0.99/230VAC at full load			
		EFFICIENCY (Typ.) Note.5	90.5%	93%	93%	93%
		TOTAL HARMONIC DISTORTION	<3%(@load=100%/230VAC)			
PROTECTION	OVER LOAD		105 ~ 115% rated output power			
			AC to DC: Constant current limiting, shut down DC O/P voltage 5 sec. after DC O/P voltage is down low, re-power on to recover			
			DC to AC: Not accurable with constant power design			
	SHORT CIRCUIT		Shut down O/P current, re-power on to recover			
	OVER VOLTAGE		17.6 ~ 20.8V	33.6 ~ 39.2V	72.6 ~ 86V	134 ~ 157V
			Protection type : Shut down O/P voltage, re-power on to recover			
	OVER TEMPERATURE		Shut down O/P voltage, recovers automatically after temperature goes down			
	ISLANDING PROTECTION		Shut down AC O/P voltage, re-power on to recover			
FUNCTION	REMOTE ON-OFF CONTROL		By electrical signal or dry contact Short: Power ON Open: Power OFF Please refer to the Function Manual infollowing			
	BIDIRECTION SWITCH TIME (Typ.)		1ms			
	ALARM SIGNAL		Isolated TTL signal output for T-Alarm, DC-OK and Fault. Please refer to the Function Manual in following pages			
	AUXILIARY POWER		12V@0.5A tolerance±5%, ripple 150mVp-p			
	BATTERY MODE RATED CURRENT(default) Note.7	AC to DC	160A	80A	40A	20A
			Can be adjusted by communication			
		DC to AC	120A	64A	32A	16A
			Can be adjusted by communication			
ENVIRONMENT	WORKING TEMP.		-30 ~ +70℃ (Refer to "Derating Curve")			
	WORKING HUMIDITY		20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing			
	TEMP. COEFFICIENT		±0.03%/℃ (0 ~ 45℃)			
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes			
SAFETY & EMC	SAFETY STANDARDS		UL62368-1, IEC62368-1, CAN/CSA C22.2 No.62368-1,TUV BS EN/EN62368-1, EAC TP TC 004, IEC62477-1, TUV BS EN/EN62477-1 approved			
	WITHSTAND VOLTAGE Note.8		I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:500VAC			
	ISOLATION RESISTANCE Note.8		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃/ 70% RH			
	EMC EMISSION		BS EN/EN55032			
			Parameter	**Standard**	**Test Level / Note**	
			Conducted	BS EN/EN55032 (CISPR32)	Class A	
			Radiated	BS EN/EN55032 (CISPR32)	Class A	
			Harmonic Current	BS EN/EN61000-3-2	Class A	
			Voltage Flicker	BS EN/EN61000-3-3	-----	
	EMC IMMUNITY		BS EN/EN55035, BS EN/EN61000-6-2			
			Parameter	**Standard**	**Test Level / Note**	
			ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact	
			Radiated	BS EN/EN61000-4-3	Level 3	
			EFT / Burst	BS EN/EN61000-4-4	Level 3	
			Surge	BS EN/EN61000-6-2	2KV/Line-Line 4KV/Line-Earth	
			Conducted	BS EN/EN61000-4-6	Level 3	
			Magnetic Field	BS EN/EN61000-4-8	Level 4	
			Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
OTHERS	MTBF		462.9K hrs min. Telcordia SR-332 (Bellcore) ; 46K hrs min. MIL-HDBK-217F (25℃)			
	DIMENSION		330*140*41mm (L*W*H)			
	PACKING		2.9Kg; 4pcs/12.6Kg/1.25CUFT			

NOTE


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.
4. As a constant power output, the driver will auto derating the current limitation when voltage raise above rated voltage(12V,24V,48V,96V) in order to remain 1800W output. On the other hand, when voltage is below rated voltage(12V,24V,48V,96V), the maximum current limitation will set at Max input current.
5. The efficiency is measured at 75% load.
6. The ambient temperature derating of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).
7. CANBus model only.
8. During withstandards voltage and isolation resistance testing, the screw "A" shall be temporarily removed, and shall be istalled back after the testing.

※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx


Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

■ BLOCK DIAGRAM


PFC fosc : 70KHz
PWM fosc : 60KHz

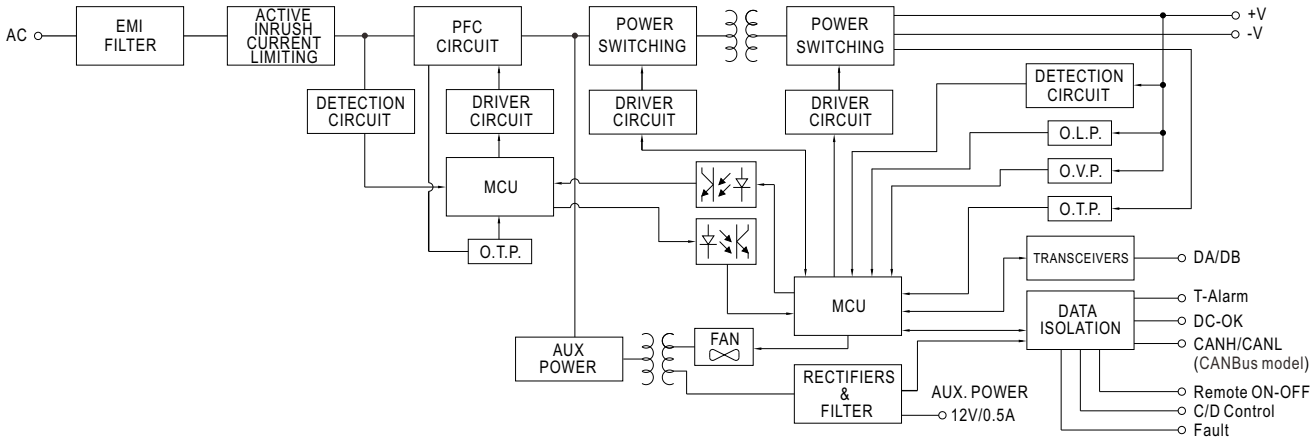

■ DERATING CURVE

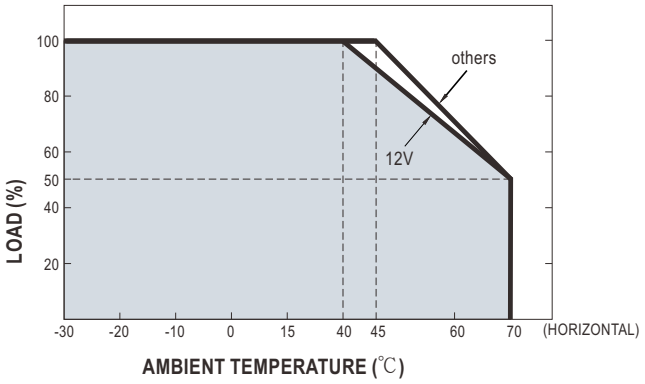

■ STATIC CHARACTERISTICS

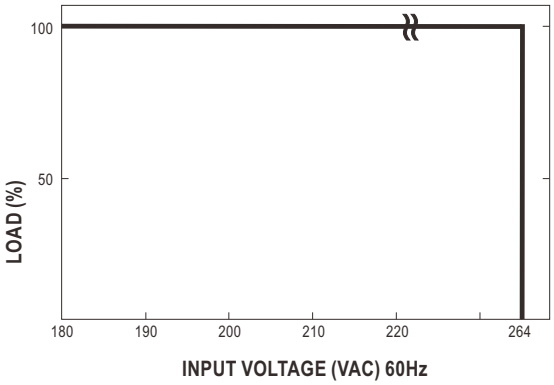


Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

■ MECHANICAL SPECIFICATION

(Unit: mm , tolerance ±0.5mm)

Case No. 277C

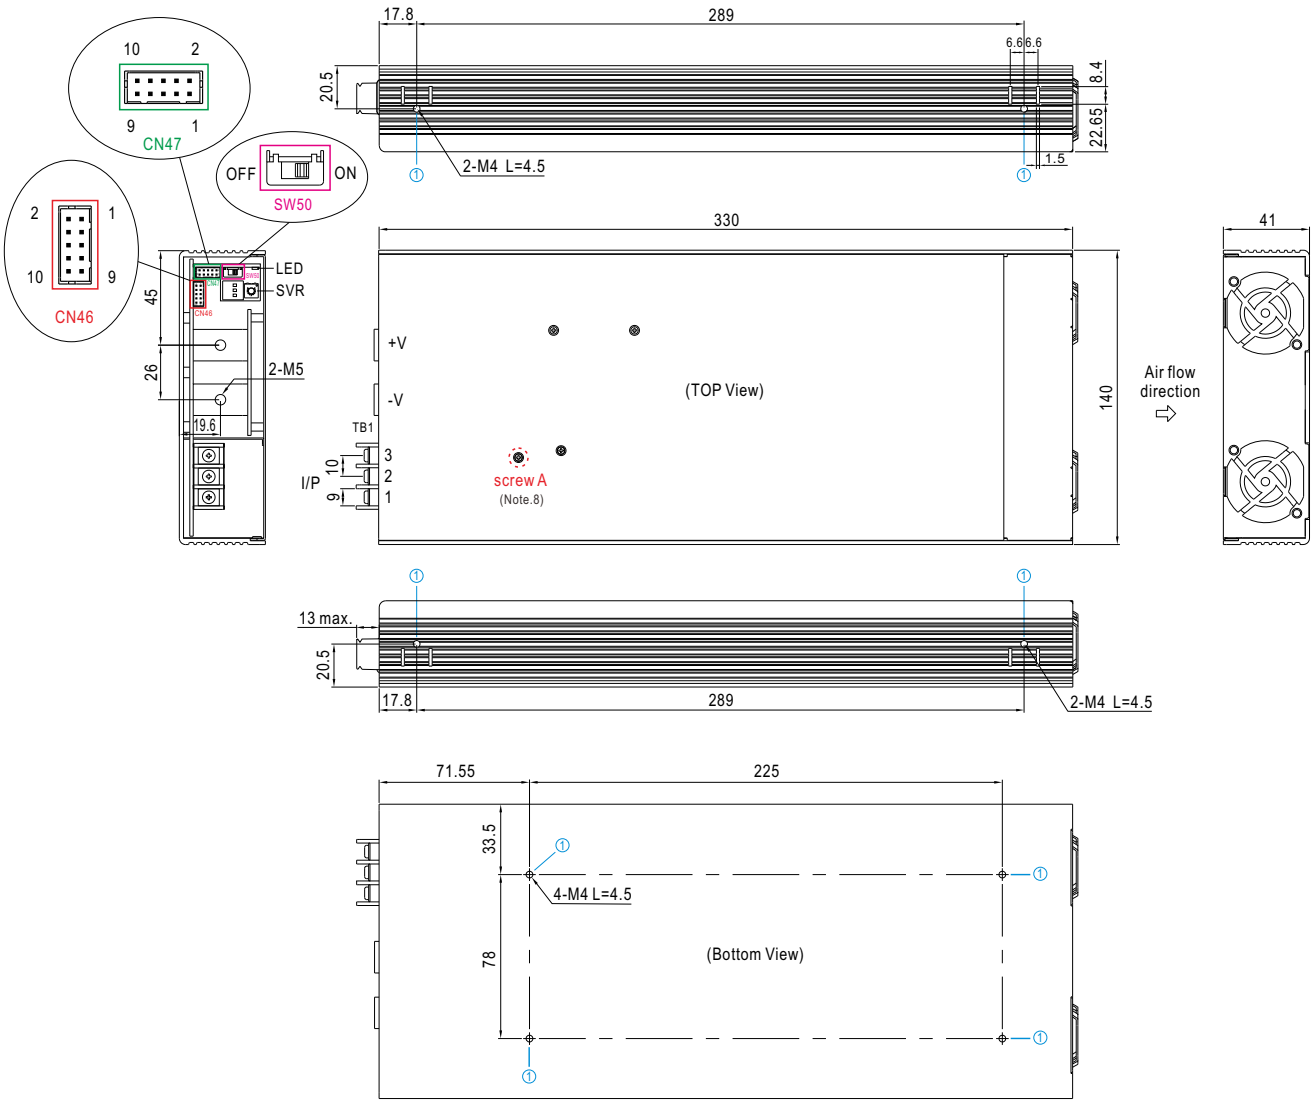

AC Input Terminal(TB1) Pin NO. Assignment

Pin No.	Assignment	Terminal	Max mounting torque
1	AC/L	DECA T35-EO32-03	18Kgf-cm
2	AC/N		
3	FG ⏚		

※DC Output Terminal Pin No. Assignment

Assignment	Diagram	Maximum mounting torque
+V, -V	○ ○	10Kgf-cm

※ LED Status Indicators


LED	Description
Green	AC to DC Direction, functions as regular power supply.
Green	DC to AC Direction, functions as grid inverter.
Red	Abnormal status (Over temperature protection, Overload protection, Fan fail.)

Light

Flash


※ Mounting Instruction

Hole No.	Recommended Screw Size	MAX. Penetration Depth L	Recommended mounting torque
①	M4	4.5mm	7~10Kgf-cm

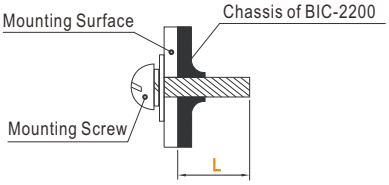

Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

※Control Pin No. Assignment(CN46) : HRS DF11-10DP-2DS or equivalent




Mating Housing	HRS DF11-10DS or equivalent
Terminal	HRS DF11-**SC or equivalent

Pin No.	Function	Description
1	+12V-AUX	Auxiliary voltage output, 11.4~12.6V, referenced to GND-AUX (pin 2,4). The maximum output current is 0.5A. This output is not controlled by the Remote ON/OFF control.
2,4	GND-AUX	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V).
3	+5V-AUX	Auxiliary voltage output, 4.5~5.5V, referenced to GND-AUX (pin 2,4) only for Remote ON/OFF used. This output is not controlled by the Remote ON/OFF control.
5	Remote ON-OFF	The unit can turn the output ON/OFF by electrical signal or dry contact between Remote ON/OFF and +5V-AUX(pin 3). (Note.1)
6	C/D Control (Note.2)	High (4.5 ~ 5.5V) : Battery Charging mode Low (-0.5 ~ 0.5V) : Battery Discharging mode (Note.1)
7	$\overline{\text{DC-OK}}$	High (4.5 ~ 5.5V) : When the Vout≦80%±5%. Low (-0.5 ~ 0.5V) : When Vout≧80%±5%. The maximum sourcing current is 4mA and only for output. (Note.1)
8	Fault	High (4.5 ~ 5.5V) : When the Vac≦165Vrms,OLP, SCP,OTP,OVP,AC Fail,fan lock,islanding protection. Low (-0.5 ~ 0.5V) : When Vac≧175Vrms and when power supply work normally. The maximum sourcing current is 4mA and only for output. (Note.1)
9	T-ALARM	High (4.5 ~ 5.5V) : When the internal temperature exceeds the limit of temperature alarm, or when any of the fans fails. Low (-0.5 ~ 0.5V) : When the internal temperature is normal, and when fans work normally. The maximum sourcing current is 4mA and only for output(Note.1)
10	NC	-----

Note 1 : Isolated signal, referenced to GND-AUX.
Note 2 : CANBus model only.

※Control Pin No. Assignment(CN47): HRS DF11-10DP-2DS or equivalent



Mating Housing	HRS DF11-10DS or equivalent
Terminal	HRS DF11-**SC or equivalent

Pin No.	Function	Description
1,2	DA	Differential digital signal for parallel control. (Note.1)
3,4	DB	
5,6	GND	Negative output voltage signal. Certain function reference. It can not be connected directly to the load.
7	CANH (CANBus model)	For CANBus model: Data line used in CANBus interface. (Note.2)
8	CANL (CANBus model)	For CANBus model: Data line used in CANBus interface. (Note.2)
9,10	GND-AUX	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V).

Note 1 : Non-isolated signal, referenced to GND.
Note 2 : Isolated signal, referenced to GND-AUX.

Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

◎ **Bidirection process**

BIC-2200 possesses AC to DC and DC to AC two way conversion functions. The conversion direction can be automatically detected and controlled by BIC-2200's internal firmware or manually switched by users according to different application requirements. Before entering detailed function explanation. Please refer to following definitions.

AC to DC (Energy absorbing and charging/ power supplying):
The BIC-2200 converts AC energy from the grid into DC energy for the battery or the loads. The operation principle is the same as an ordinary power supply or a charger.




DC to AC (Energy recycling and discharging):
Opposite to the AC to DC conversion, the BIC-2200 converts DC energy from the battery or loads into AC energy, then feeding back to the grid. AC output synchronization range is 180Vac~264Vac/47Hz~63Hz, the bidirectional power supply can work normally as long as the AC gird is within the range.



Bi-direction auto-detect mode:
This is default factory setting, BIC-2200 operates as table below

Condition	Mode
Set voltage > load voltage	AC to DC
Set voltage < load voltage	DC to AC

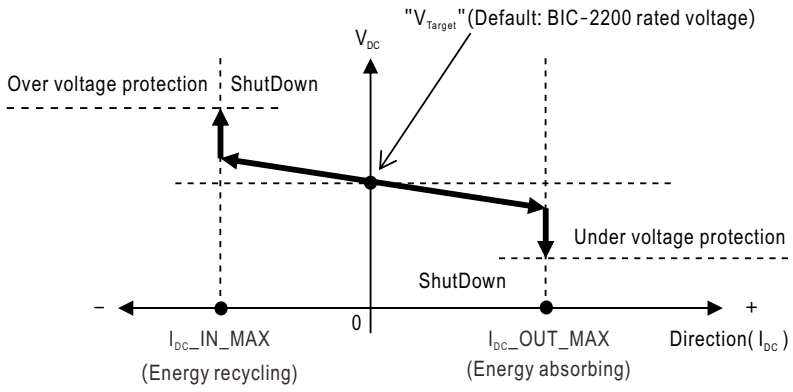

Operating characteristic curve

Note:Detail of set voltage, please refer to user's manual.

Bi-direction battery mode:

This mode only can be activated by CANBus model. Set the BIC-2200 in AC to DC (charging) or DC to AC (discharging) conversion directly through command DIRECTION_CTRL below.

Command	Conversion
DIRECTION_CTRL = 00h	AC to DC (charging)
DIRECTION_CTRL = 01h	DC to AC (discharging)

Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

◎ Current Sharing

BIC-2200 has the built-in active current sharing function and can be connected in parallel, up to 9 units, to provide higher output power as exhibited below :

※ The power supplies should be paralleled using short and large diameter wiring and then connected to the load.

※ In parallel connection, power supply with the highest output Voltage will be the master unit and its Vout will be the DC bus voltage.


※ The total output current must not exceed the value determined by the following equation:
Maximum output current at parallel operation=(Rated current per unit)×(Number of unit)×0.95


※ When the total output current is less than 5% of the total rated current, or say (5% of Rated current per unit)×(Number of unit) the current shared among units may not be balanced.

※ CN47/SW50 Function pin connection

Parallel	PSU1		PSU2		PSU3		PSU4		PSU5		PSU6		PSU7		PSU8		PSU9	
	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50
1 unit	X	ON	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2 unit	V	ON	V	ON	—	—	—	—	—	—	—	—	—	—	—	—	—	—
3 unit	V	ON	V	OFF	V	ON	—	—	—	—	—	—	—	—	—	—	—	—
4 unit	V	ON	V	OFF	V	OFF	V	ON	—	—	—	—	—	—	—	—	—	—
5 unit	V	ON	V	OFF	V	OFF	V	OFF	V	ON	—	—	—	—	—	—	—	—
6 unit	V	ON	V	OFF	V	OFF	V	OFF	V	OFF	V	ON	—	—	—	—	—	—
7 unit	V	ON	V	OFF	V	OFF	V	OFF	V	OFF	V	OFF	V	ON	—	—	—	—
8 unit	V	ON	V	OFF	V	OFF	V	OFF	V	OFF	V	OFF	V	OFF	V	ON	—	—
9 unit	V	ON	V	OFF	V	OFF	V	OFF	V	OFF	V	OFF	V	OFF	V	OFF	V	ON

(V : CN47 connected ; X : CN47 not connected)

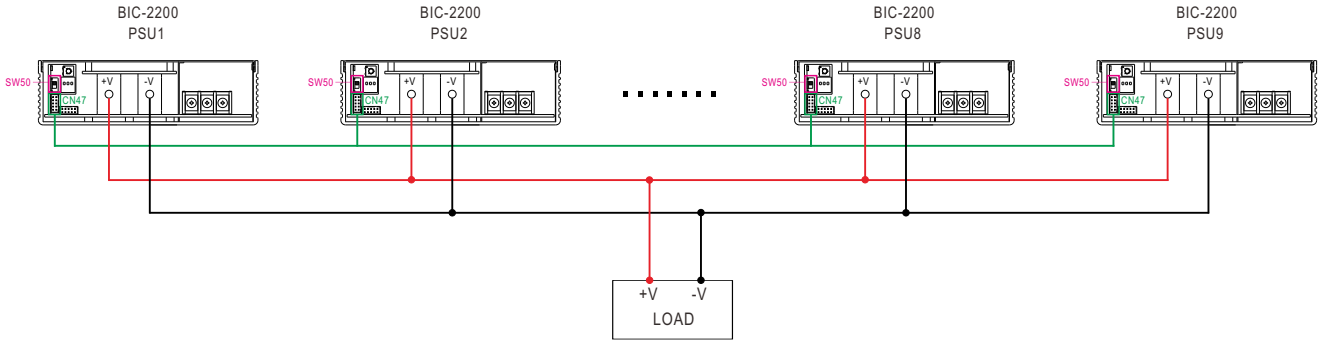

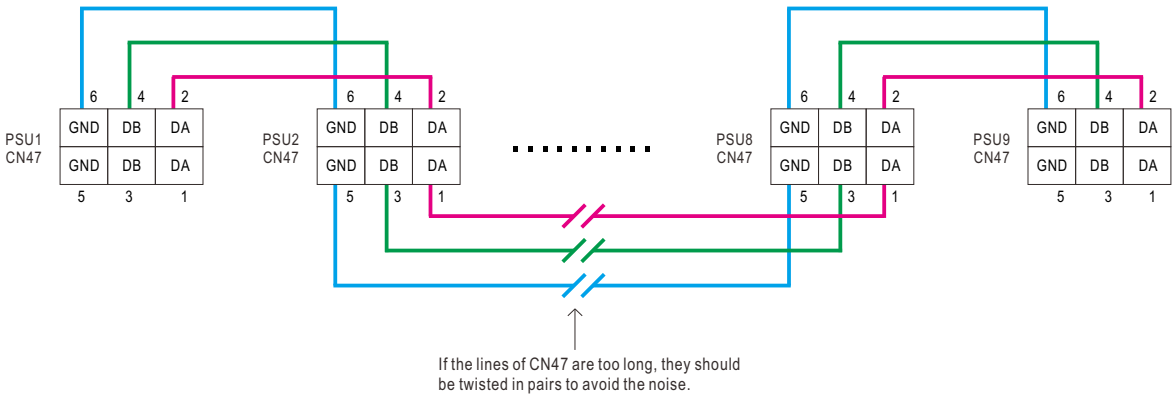

◎ DA,DB connected mutually in parallel.

Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

◎ **3-phase 4-wire AC power system**

The BIC-2200 can be installed in a 3-phase 4-wire AC power system. To ensure more balanced operation of multiple BIC-2200 units within the system, it is recommended to evenly distribute the bidirectional power supplies across each phase. For example, if 9 units need to be installed, they should be split into 3 for each phase.

