



8W Single Output Switching Power Supply

APC-8 series

User's Manual



IP42

IS 15885(Part 2/Sec13)
R-41027766



Features

- Constant current design
- Universal AC input / Full range
- Class II power unit, no FG
- Fully isolated plastic case
- IP42 design
- Small and compact size
- Cooling by free air convection
- Protection: Short circuit
- No load power consumption <0.5W
- 100% full load burn-in test
- Low cost / High reliability
- 2 years warranty

Applications

- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)(Note.6)

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

APC-8 series is one 8W AC/DC constant current mode single output LED power supply. It accepts the full range input 90~264VAC and provides four models with different output current, 250mA, 350mA, 500mA and 700mA, respectively, that the small wattage LED applications employ the most frequently. Exploiting Class II design (without FG pin) and adopting the 94V-0 flame retardant plastic enclosure, APC-8 ideally fits the entry-level LED applications.

Model Encoding

APC - 8 - 350

Output current

Output wattage

Series name



8W Single Output Switching Power Supply

APC-8 series

SPECIFICATION

MODEL		APC-8-250		APC-8-350		APC-8-500		APC-8-700	
OUTPUT	RATED CURRENT	250mA		350mA		500mA		700mA	
	OPERATING VOLTAGE RANGE Note.4	16~32V		11~23V		8~16V		6~11V	
	RATED POWER	8W		8.05W		8W		7.7W	
	RIPPLE & NOISE (max.) Note.2	350mVp-p		300mVp-p		300mVp-p		250mVp-p	
	NO LOAD OUTPUT VOLTAGE	38V		29V		24V		17V	
	CURRENT ACCURACY	±8.0%							
	SETUP, RISE TIME	500ms, 180ms / 230VAC 3000ms, 150ms / 115VAC at full load							
	HOLD UP TIME (Typ.)	20ms/230VAC at full load							
INPUT	VOLTAGE RANGE Note.3	90 ~ 264VAC 127 ~ 370VDC (Note.5)							
	FREQUENCY RANGE	47 ~ 63Hz							
	EFFICIENCY(Typ.)	82.5%		81.5%		81%		80%	
	AC CURRENT	0.15A/230VAC;0.3A/115VAC							
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=120μs measured at 50% Ipeak) at 230VAC							
	LEAKAGE CURRENT	0.25mA / 240VAC							
PROTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.							
ENVIRONMENT	WORKING TEMP.	-15 ~ 70℃ (Refer to "Derating Curve")							
	WORKING HUMIDITY	20 ~ 90% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +80℃, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.2%/℃ (0 ~45℃)							
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes							
SAFETY & EMC	SAFETY STANDARDS Note.7	UL8750,CSA C22.2 No.250.0-08, BIS IS15885, EAC TP TC 004; BS EN/EN 62368-1 approved							
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC							
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25℃ / 70% RH							
	EMC EMISSION	Compliance to BS EN/EN55032,BS EN/EN61000-3-2,BS EN/EN61000-3-3, EAC TP TC 020							
	EMC IMMUNITY	Compliance to BS EN/EN55035,BS EN/EN61000-4-2,3,4,5,6,8,11; light industry level(surge 2KV), EAC TP TC 020							
OTHERS	MTBF	14511.7K hrs min. Telcordia SR-332 (Bellcore) ; 2275.9K hrs min. MIL-HDBK-217F (25℃)							
	DIMENSION	60*30*23.5mm(L*W*H)							
	PACKING	0.05Kg;144pcs/7.6Kg/0.79CUFT							
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Derating may be needed under low input voltage, please check the static characteristic for more details. 4. Constant current operation region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design. 5. When applying DC voltage for input, please connect the brown input wire to the positive side whereas blue input wire to the negative side. 6. This product is not intended for LED lighting luminaire applications in the EU and China.(In the EU and China the LPF/NPF/XLG/XLC/XLN series are recommended.) 7. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 8. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx								




8W Single Output Switching Power Supply


APC-8 series

Mechanical Specification

Unit:mm Tolerance:±1

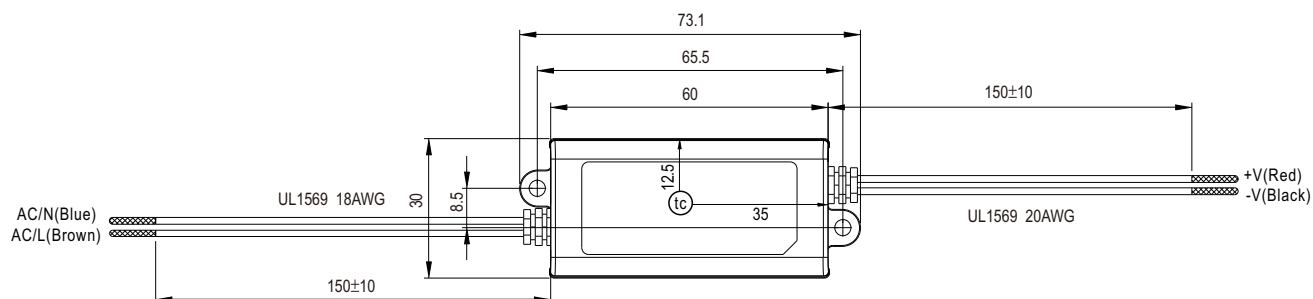


• t_c : Max. Case Temperature




Block Diagram

fosc : 67KHz

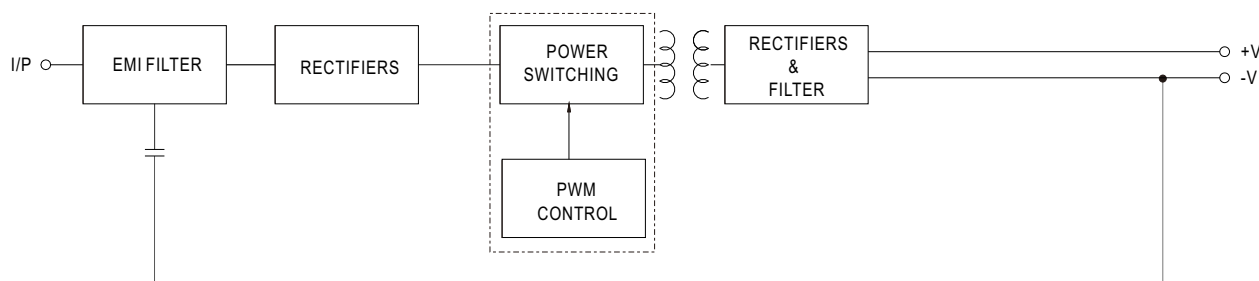

Derating Curve

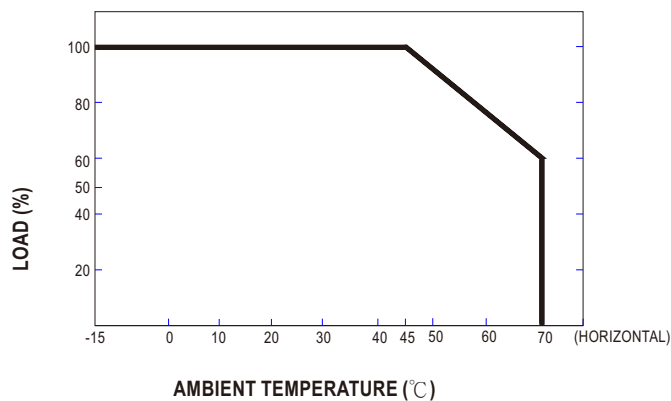

Static Characteristics

