Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

2W SMD Package DC-DC Unregulated Converter DETN02-N series

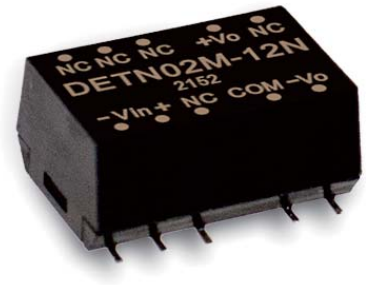

Automate Industrial Security Network Telecom

Features

- SMD package with industry standard pinout
- Operating temperature range -40 ~ +85℃
- High efficiency up to 83%
- 3KVDC I/O isolation
- Low cost
- 3 years warranty

Applications

- Telecom/datacom system
- Wireless network
- Industrial control facility
- Instrument
- Analyzer
- Detector
- Data switch

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

DETN02-N series is 2W isolated and unregulated module type DC-DC converter with SMD package. It features international standard pins, a high efficiency up to 83%, wide working temperature range -40~+85℃, 3KVDC I/P-O/P isolation voltage, compliance to BS EN/EN55032. The models account for different input voltage 5V/12V/24V±10%, and various output voltage, ±5V/±12V/±15Vfor Dual output which are suitable for all kinds of systems, Such as industrial control, telecommunication field, distributed power architecture, and so on.

Model Encoding

DETN02 L – 12 N

- NEW Series
- Output voltage (±5/±12/±15Vdc)
- Input voltage (L: 4.5 ~ 5.5Vdc，M: 10.8 ~ 13.2Vdc，N: 21.6 ~ 26.4Vdc)
- Rated wattage
- Series name

Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

MODEL SELECTION TABLE

ORDER NO.	INPUT			OUTPUT		EFFICIENCY (TYP.)	CAPACITOR LOAD (MAX.)
	INPUT VOLTAGE (RANGE)	INPUT CURRENT		OUTPUT VOLTAGE	OUTPUT CURRENT		
		NO LOAD	FULL LOAD				
DETN02L-05N	Normal 5V (4.5 ~ 5.5V)	60mA	513mA	±5V	±20 ~ 200mA	81%	±680μF
DETN02L-12N		60mA	500mA	±12V	±8 ~ 83mA	81%	±220μF
DETN02L-15N		60mA	494mA	±15V	±6 ~ 66mA	83%	±220μF
DETN02M-05N	Normal 12V (10.8 ~ 13.2V)	30mA	208mA	±5V	±20 ~ 200mA	82%	±680μF
DETN02M-12N		30mA	203mA	±12V	±8 ~ 83mA	80%	±220μF
DETN02M-15N		30mA	200mA	±15V	±6 ~ 66mA	81%	±220μF
DETN02N-05N	Normal 24V (21.6 ~ 26.4V)	15mA	107mA	±5V	±20 ~ 200mA	81%	±680μF
DETN02N-12N		15mA	104mA	±12V	±8 ~ 83mA	82%	±220μF
DETN02N-15N		15mA	104mA	±15V	±6 ~ 66mA	82%	±220μF

Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

2W SMD Package DC-DC Unregulated Converter DETN02-N series

SPECIFICATION				
INPUT	VOLTAGE RANGE	L: 4.5 ~ 5.5Vdc M: 10.8 ~ 13.2Vdc N: 21.6 ~ 26.4Vdc		
	FILTER	Internal capacitor		
	PROTECTION	Fuse recommended. 5Vin models: 800mA Slow-Blow Type 12Vin models: 300mA Slow-Blow Type 24Vin models: 170mA Slow-Blow Type		
	INTERNAL POWER DISSIPATION	500mW		
OUTPUT	VOLTAGE ACCURACY	±5.0%		
	RATED POWER	2W		
	RIPPLE & NOISE Note.2	150mVp-p		
	LINE REGULATION Note.3	1.2% for 1% input variation		
	LOAD REGULATION Note.4	±8%		
	SWITCHING FREQUENCY (Typ.)	85KHz		
PROTECTION	SHORT CIRCUIT	0.5 second max.		
ENVIRONMENT	COOLING	Free-air convection		
	WORKING TEMP.	-40 ~ +85℃ (Refer to "Derating Curve")		
	CASE TEMPERATURE	+90℃ max.		
	WORKING HUMIDITY	20% ~ 90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-55 ~ +125℃, 10 ~ 95% RH non-condensing		
	TEMP. COEFFICIENT	0.03% / ℃ (0 ~ 90℃)		
	SOLDERING TEMPERATURE	1.5mm from case of 1 ~ 10sec./240℃ max.		
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes		
SAFETY & EMC (Note.5,6)	SAFETY STANDARDS	EAC TP TC 020/2011 approved		
	WITHSTAND VOLTAGE	I/P-O/P:3KVDC		
	ISOLATION RESISTANCE	I/P-O/P:10G Ohms / 500VDC / 25℃/ 70% RH		
	ISOLATION CAPACITANCE (Typ.)	115pF		
	EMC EMISSION	**Parameter**	**Standard**	**Test Level / Note(Note.6)**
		Conducted	BS EN/EN55032(CISPR32)	Class A/B with external components (see page 5)
		Radiated	BS EN/EN55032(CISPR32)	
	EMC IMMUNITY	**Parameter**	**Standard**	**Test Level / Note**
		ESD	BS EN/EN61000-4-2	±8KV air ; ±6KV contact, Criterion B
		Radiated Susceptibility	BS EN/EN61000-4-3	3V/m, Criterion A
		EFT/Bursts	BS EN/EN61000-4-4	1KV at power, Criterion B
		Surge	BS EN/EN61000-4-5	0.5KV Line-Line, Criterion B
		Conducted	BS EN/EN61000-4-6	3Vrms, Criterion A
		Magnetic Field	BS EN/EN61000-4-8	1A/m, Criterion A
OTHERS	MTBF	886Khrs min. MIL-HDBK-217F(25℃)		
	DIMENSION (L*W*H)	15.24*10.9*9.1mm (0.6*0.43*0.36 inch)		
	CASE MATERIAL	Non-Conductive black plastic (UL 94V-0 rated)		
	PACKING	1.6g ; 33pcs/per tube, 1584pcs/48 tube/per carton		
NOTE	1.All parameters are specified at normal input(L:5Vdc, M:12Vdc, N:24Vdc), rated load, 25℃ 70% RH ambient. 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1μf & 47μf capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 10% to 100% rated load. 5.The final equipment must be re-confirm that it still meet EMC directives. For guidance on how to perform these EMC tests, please refer to “EMI testing of component power supplies.”(as available on http://www.meanwell.com) 6.An external input filter capacitor is required if the module has to meet BS EN/EN61000-4-4, BS EN/EN61000-4-5. The filter capacitor Power Mate suggest: 470μF/100V. ※ Product Liability Disclaimer ： For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx			

Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

■ Mechanical Specification

- All dimensions in mm(inch)
- Tolerance:x.x±0.5mm(x.xx±0.02")
  x.xx±0.25mm(x.xxx±0.01")
- Pin size is 0.50x0.30mm (0.02"x0.01")
- Pin is Tolerance:x.xx±0.07mm(x.xxx±0.03")





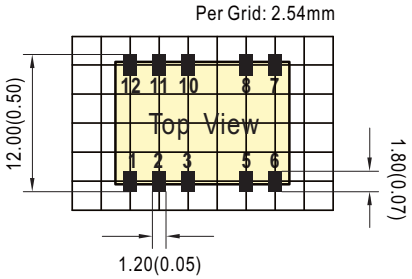





■ Plug Assignment

Pin No.	Pin-Out
1	-Vin
2	+Vin
5	Common
6	-Vout
8	+Vout
3,7,10,11,12	N.C.

■ Derating Curve

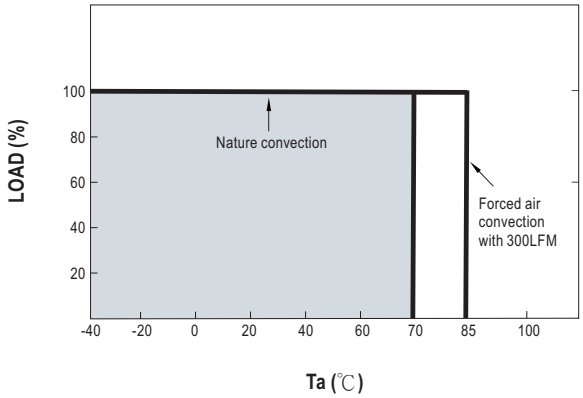

■ Reflow Soldering Curve

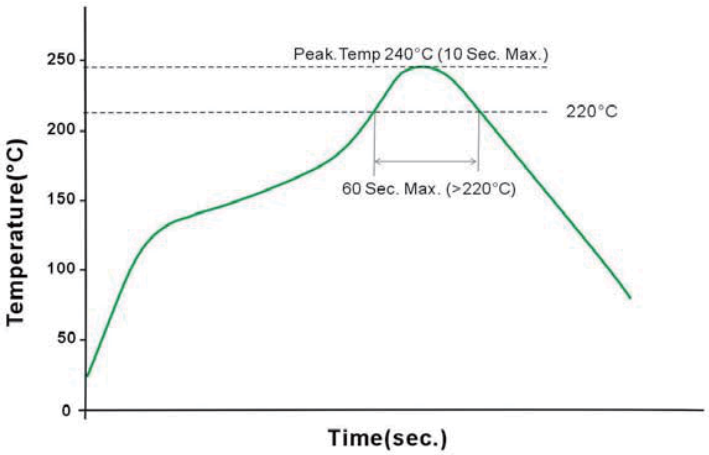

Remark: The curve applies only to the hot air reflow soldering.

Über die gesetzliche Gewährleistung hinausgehende Garantieangaben sind Herstellergarantien.

■ EMC Suggestion Circuit

※Required external componets to meet BS EN/EN55032 Class A/B are as below:

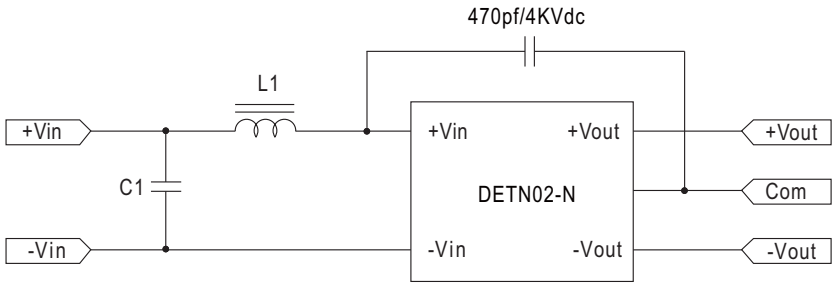

Model No.	Class A		Class B	
	L1	C1	L1	C1
DETN02L-xxN	10μH	4.7μF	22μH	4.7μF
DETN02M-xxN	3.3μH	2.2μF	10μH	2.2μF
DETN02N-xxN	22μH	2.2μF	47μH	2.2μF

■ Packing

Standard Tube Packing	MPQ Per Tube (PCS)	One Tube G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm 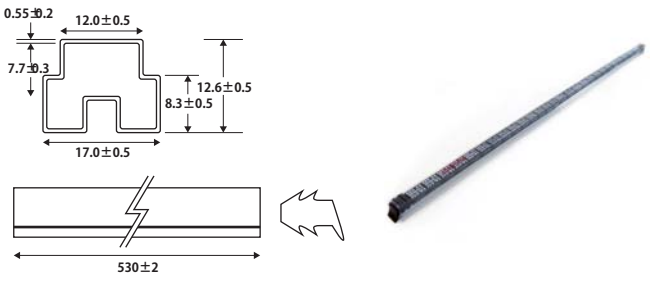 TUBE PATTERN  CARTON L545 x W145 x H155	33	0.075Kg	1584	4Kg

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html